

12. Diagnostic Procedure with Diagnostic Trouble Code (DTC)

A: DTC B1100 INTEG. UNIT SYSTEM ERROR

DTC DETECTING CONDITION:

Memory read out error in body integrated unit

TROUBLE SYMPTOM:

LAN communication immobilizer function may not be executed normally.

Step	Check	Yes	No
1 CHECK DTC. Check DTC indicated by body integrated unit. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is B1100 a current malfunction?	Go to step 2.	Temporary EEPROM access error occurred.
2 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the body integrated unit connector. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is B1100 a current malfunction?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Temporary EEPROM access error occurred.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

B: DTC B1101 BATT P/SUPPLY MALFUNCTION CONT

DTC DETECTING CONDITION:

- Open or short in battery power supply control circuit
- Voltage malfunction caused by poor contact

TROUBLE SYMPTOM:


Each function (such as door lock control) stops operation.

NOTE:

- When B1102 BATT P/SUPPLY MALFUNCTION BACKUP is output at the same time, all the function of body integrated unit may not operate.
- B1101 may input when the battery run-out occurs.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

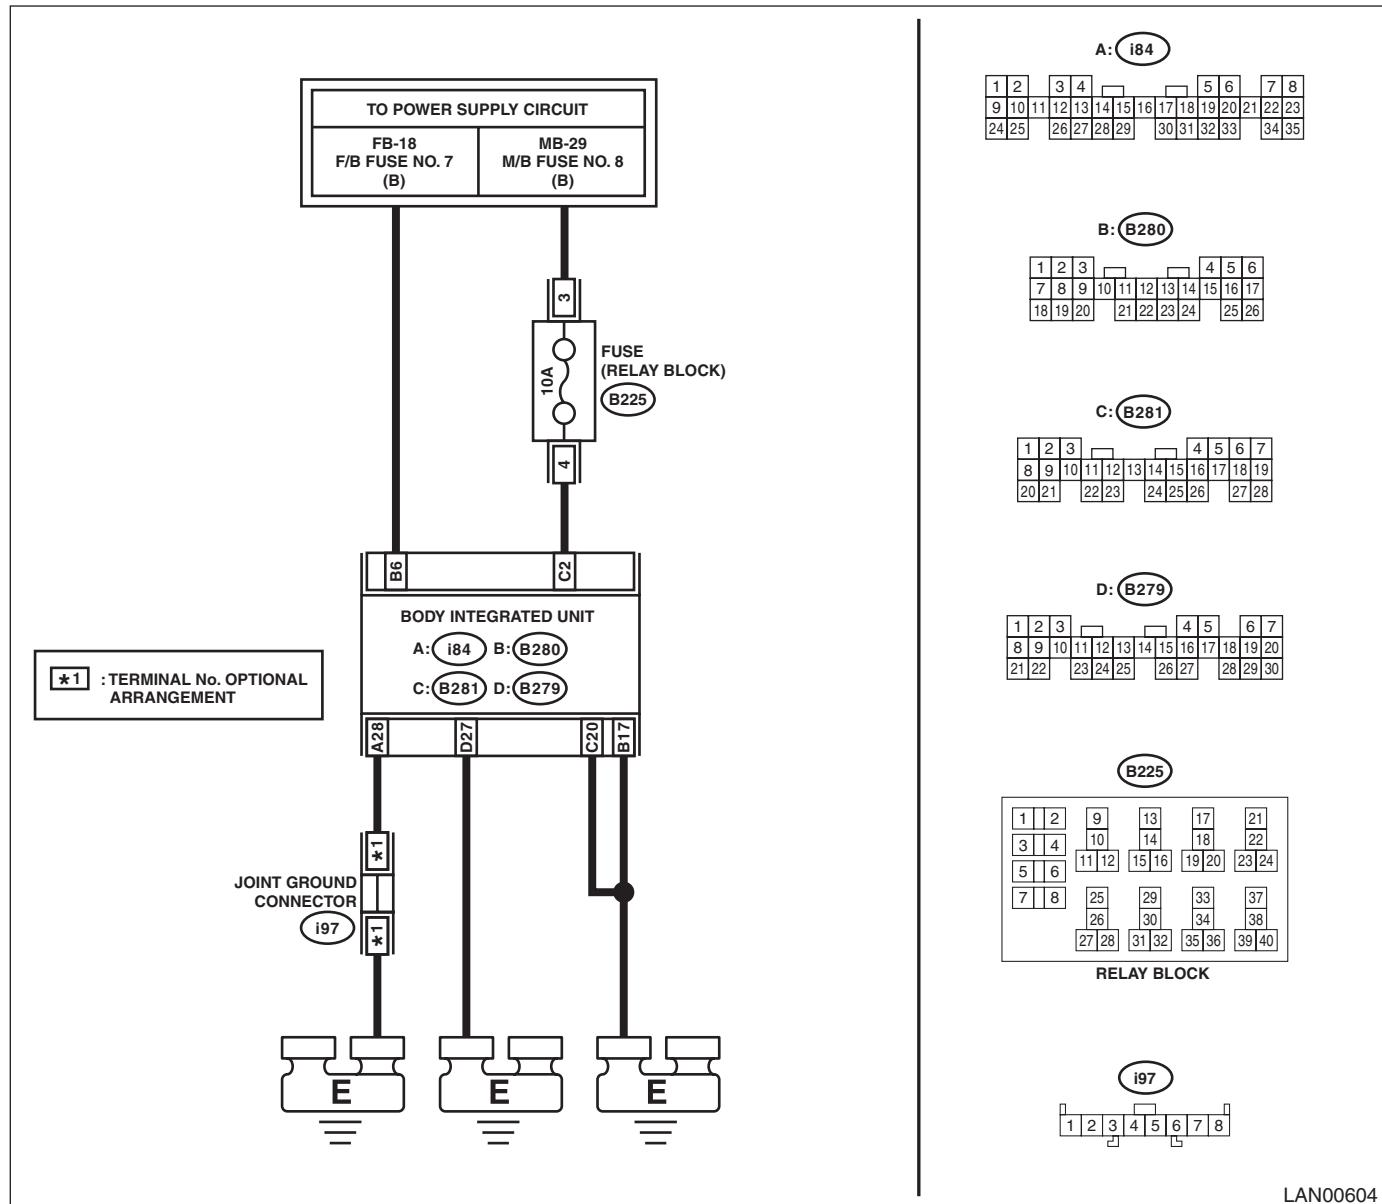

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is B1101 current malfunction?	Go to step 2.	Go to step 5.
2 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect the connector from body integrated unit and reconnect. 3) Wait approx. 2 minutes. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is B1101 current malfunction?	Go to step 3.	Go to step 5.
3 CHECK FUSE. 1) Turn the ignition switch to OFF. 2) Check the fuse.	Is the fuse OK?	Go to step 4.	Replace the defective fuse.
4 CHECK HARNESS. 1) Disconnect the body integrated unit connector (B280). 2) Measure the voltage between body integrated unit connector and chassis ground using tester. <i>Connector & terminal (B280) No. 6 (+) — Chassis ground (-):</i>	Is the voltage 8.5 — 16.5 V?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Repair or replace the open or shorted circuit between body integrated unit and fuse.
5 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the body integrated unit connector (B280).	Is there poor contact of connector?	Repair or replace the poor contact of connector.	A temporary change of voltage occurred.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

C: DTC B1102 BATT P/SUPPLY MALFUNCTION BACKUP

DTC DETECTING CONDITION:

- Open or short of battery power supply backup circuit
- Voltage malfunction caused by poor contact

TROUBLE SYMPTOM:


No influence.

NOTE:

- When B1101 BATT P/SUPPLY MALFUNCTION CONT. is output at the same time, all function of body integrated unit may not operate.
- B1101 may input when the battery run-out occurs.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

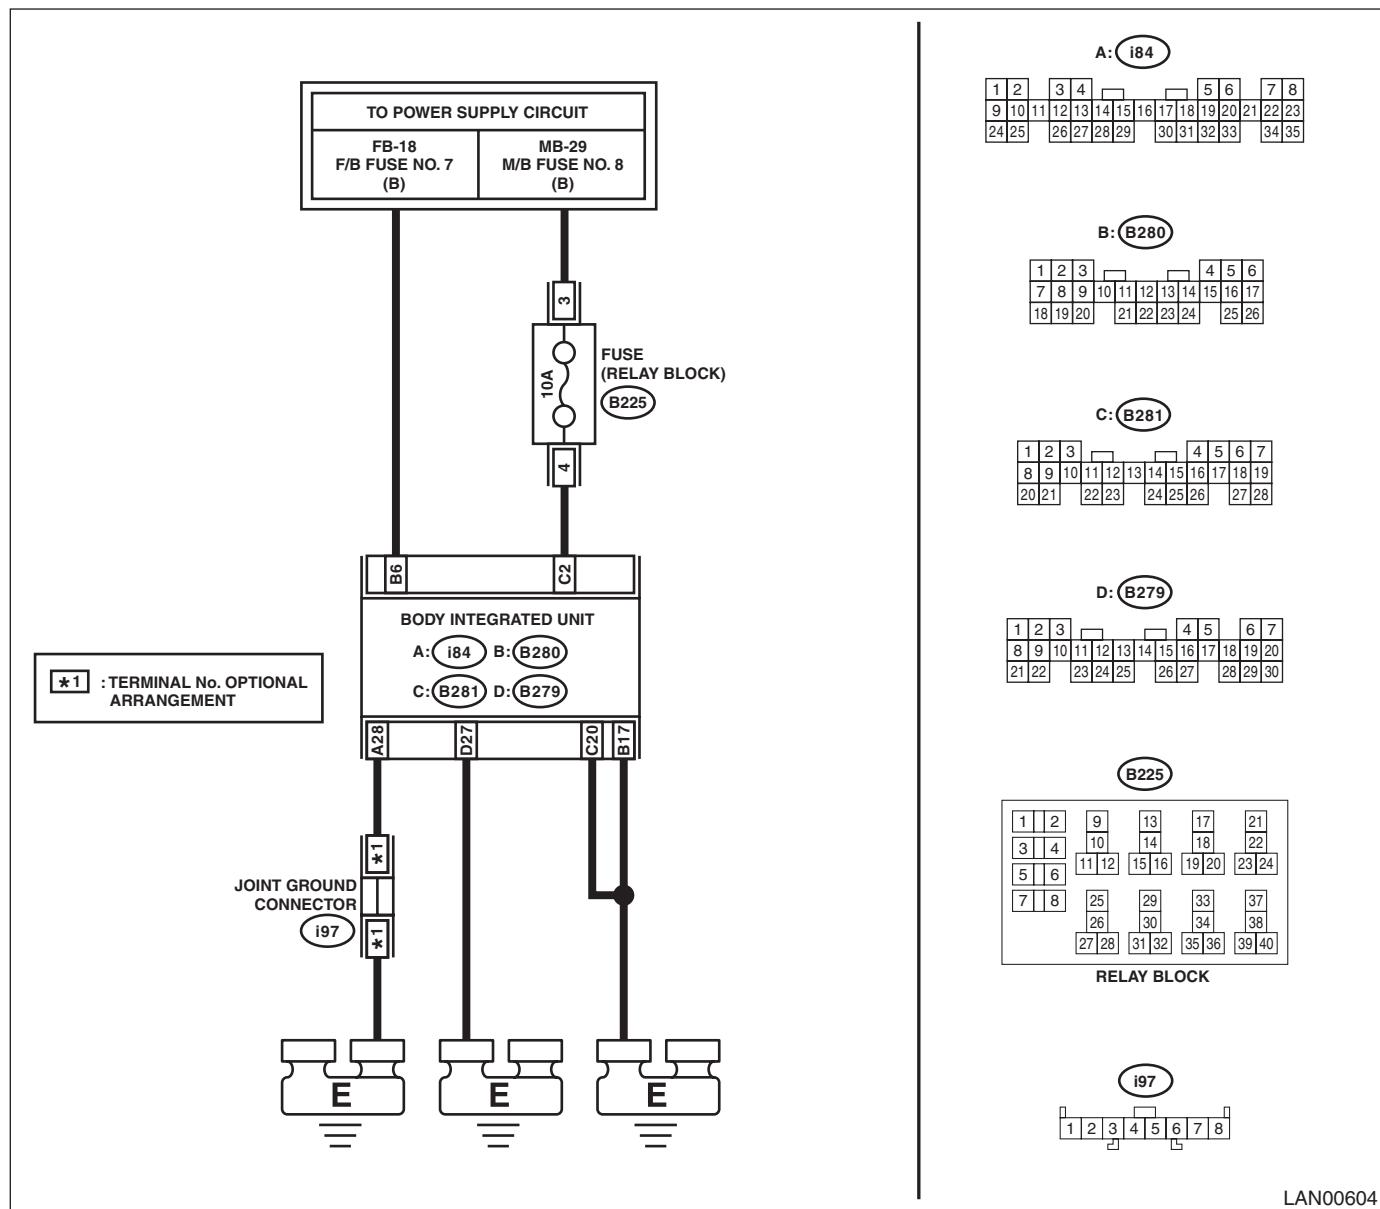

LAN00604

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is B1102 current malfunction?	Go to step 2.	Go to step 5.
2 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect the connector from body integrated unit and reconnect. 3) Wait approx. 2 minutes. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is B1102 current malfunction?	Go to step 3.	Go to step 5.
3 CHECK FUSE. 1) Turn the ignition switch to OFF. 2) Check the fuse.	Is the fuse OK?	Go to step 4.	Replace the defective fuse.
4 CHECK HARNESS. 1) Disconnect the body integrated unit connector (B281). 2) Measure the voltage between body integrated unit connector and chassis ground using tester. <i>Connector & terminal (B281) No. 2 (+) — Chassis ground (-):</i>	Is the voltage 8.5 — 16.5 V?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Repair or replace the open or shorted circuit between body integrated unit and fuse.
5 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the body integrated unit connector (B281).	Is there poor contact of connector?	Repair or replace the poor contact of connector.	A temporary change of voltage occurred.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

D: DTC B1103 IGNITION POWER FAILURE

DTC DETECTING CONDITION:

- Open or short in IGN power supply circuit
- Voltage malfunction caused by poor contact

TROUBLE SYMPTOM:


Error related to LAN system will not be detected.

NOTE:

B1103 may output when the ignition switch turns to ON with the weak battery condition.

WIRING DIAGRAM:

Headlight System <Ref. to WI-90, WIRING DIAGRAM, Headlight System.>

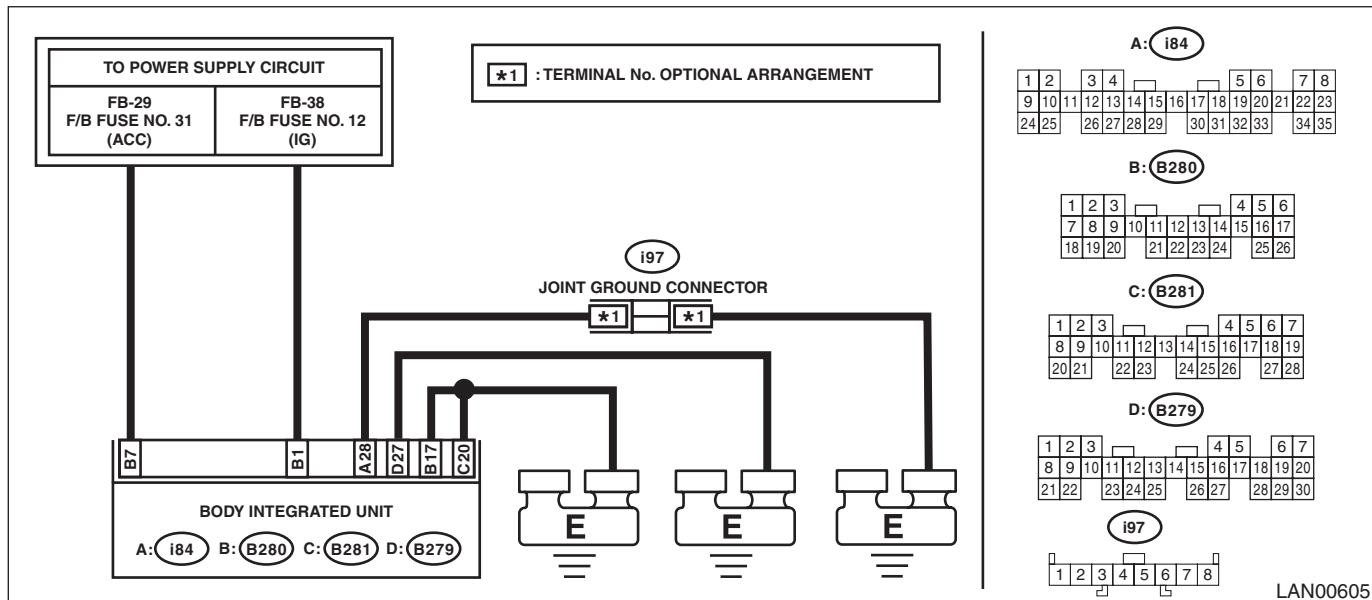

LAN00605

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is B1103 current malfunction?	Go to step 2.	Go to step 5.
2 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect the connector from body integrated unit and reconnect. 3) Turn the ignition switch to ON. 4) Wait approx. 2 minutes. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is B1103 current malfunction?	Go to step 3.	Go to step 5.
3 CHECK FUSE. 1) Turn the ignition switch to OFF. 2) Check the fuse.	Is the fuse OK?	Go to step 4.	Replace the defective fuse.
4 CHECK HARNESS. 1) Disconnect the body integrated unit connector (B280). 2) Turn the ignition switch to ON. 3) Measure the voltage between body integrated unit connector and chassis ground using tester. <i>Connector & terminal (B280) No. 1 (+) — Chassis ground (-):</i>	Is the voltage 8.5 — 16.5 V?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Repair or replace the open or shorted circuit between body integrated unit and fuse.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
5 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the body integrated unit connector (B280).	Is there poor contact of connector?	Repair or replace the poor contact of connector.	A temporary change of voltage occurred.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

E: DTC B1104 ACC POWER FAILURE

DTC DETECTING CONDITION:

- Open or short in ACC power supply circuit
- Voltage malfunction caused by poor contact

TROUBLE SYMPTOM:


Does not exist.

NOTE:

B1104 may output when the ignition switch turns to ACC with the weak battery condition.

WIRING DIAGRAM:

Headlight System <Ref. to WI-90, WIRING DIAGRAM, Headlight System.>

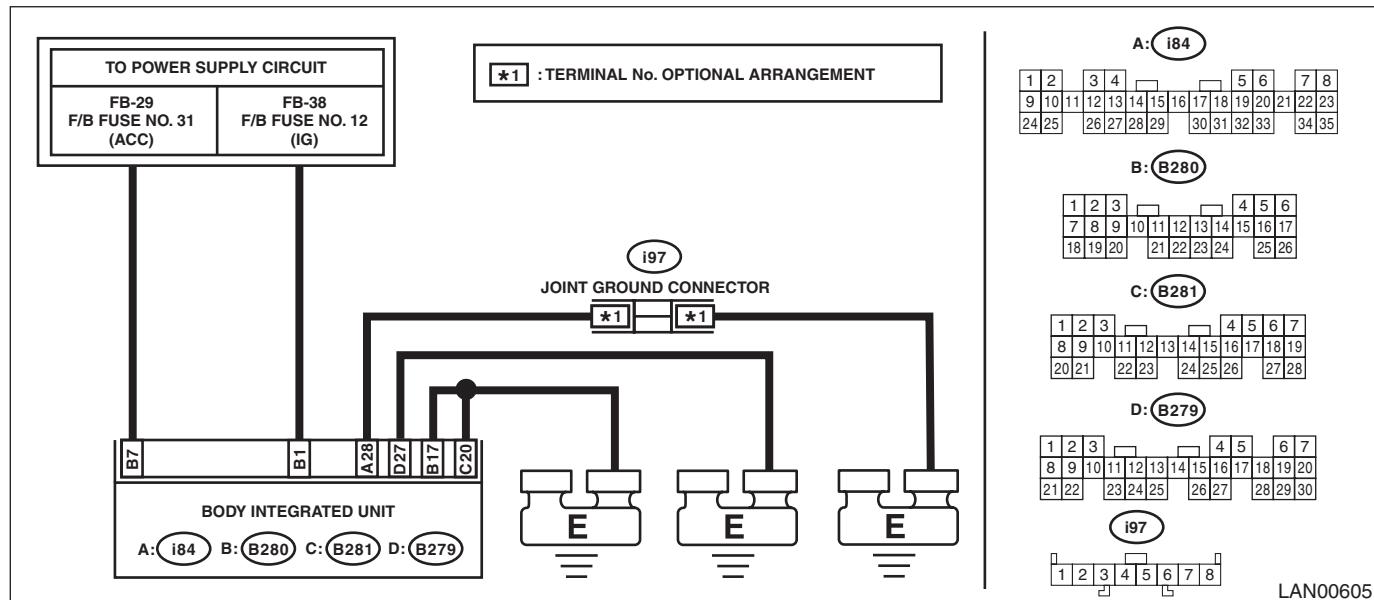

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is B1104 current malfunction?	Go to step 2.	Go to step 5.
2 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect the connector from body integrated unit and reconnect. 3) Turn the ignition switch to ACC. 4) Wait approx. 2 minutes. 5) Turn the ignition switch to ON. 6) Read the DTC of body integrated unit using Subaru Select Monitor.	Is B1104 current malfunction?	Go to step 3.	Go to step 5.
3 CHECK FUSE. 1) Turn the ignition switch to OFF. 2) Check the fuse.	Is the fuse OK?	Go to step 4.	Replace the defective fuse.
4 CHECK HARNESS. 1) Disconnect the body integrated unit connector (B280). 2) Turn the ignition switch to ACC. 3) Measure the voltage between body integrated unit connector and chassis ground using tester. <i>Connector & terminal (B280) No. 7 (+) — Chassis ground (-):</i>	Is the voltage 8.5 — 16.5 V?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Repair or replace the open or shorted circuit between body integrated unit and fuse.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
5 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the body integrated unit connector (B280).	Is there poor contact of connector?	Repair or replace the poor contact of connector.	A temporary change of voltage occurred.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

F: DTC U1201 CAN-HS COUNTER ABNORMAL

DTC DETECTING CONDITION:


Communication is unstable because of high speed CAN communication error.

TROUBLE SYMPTOM:

Malfunction indicator light illuminates.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

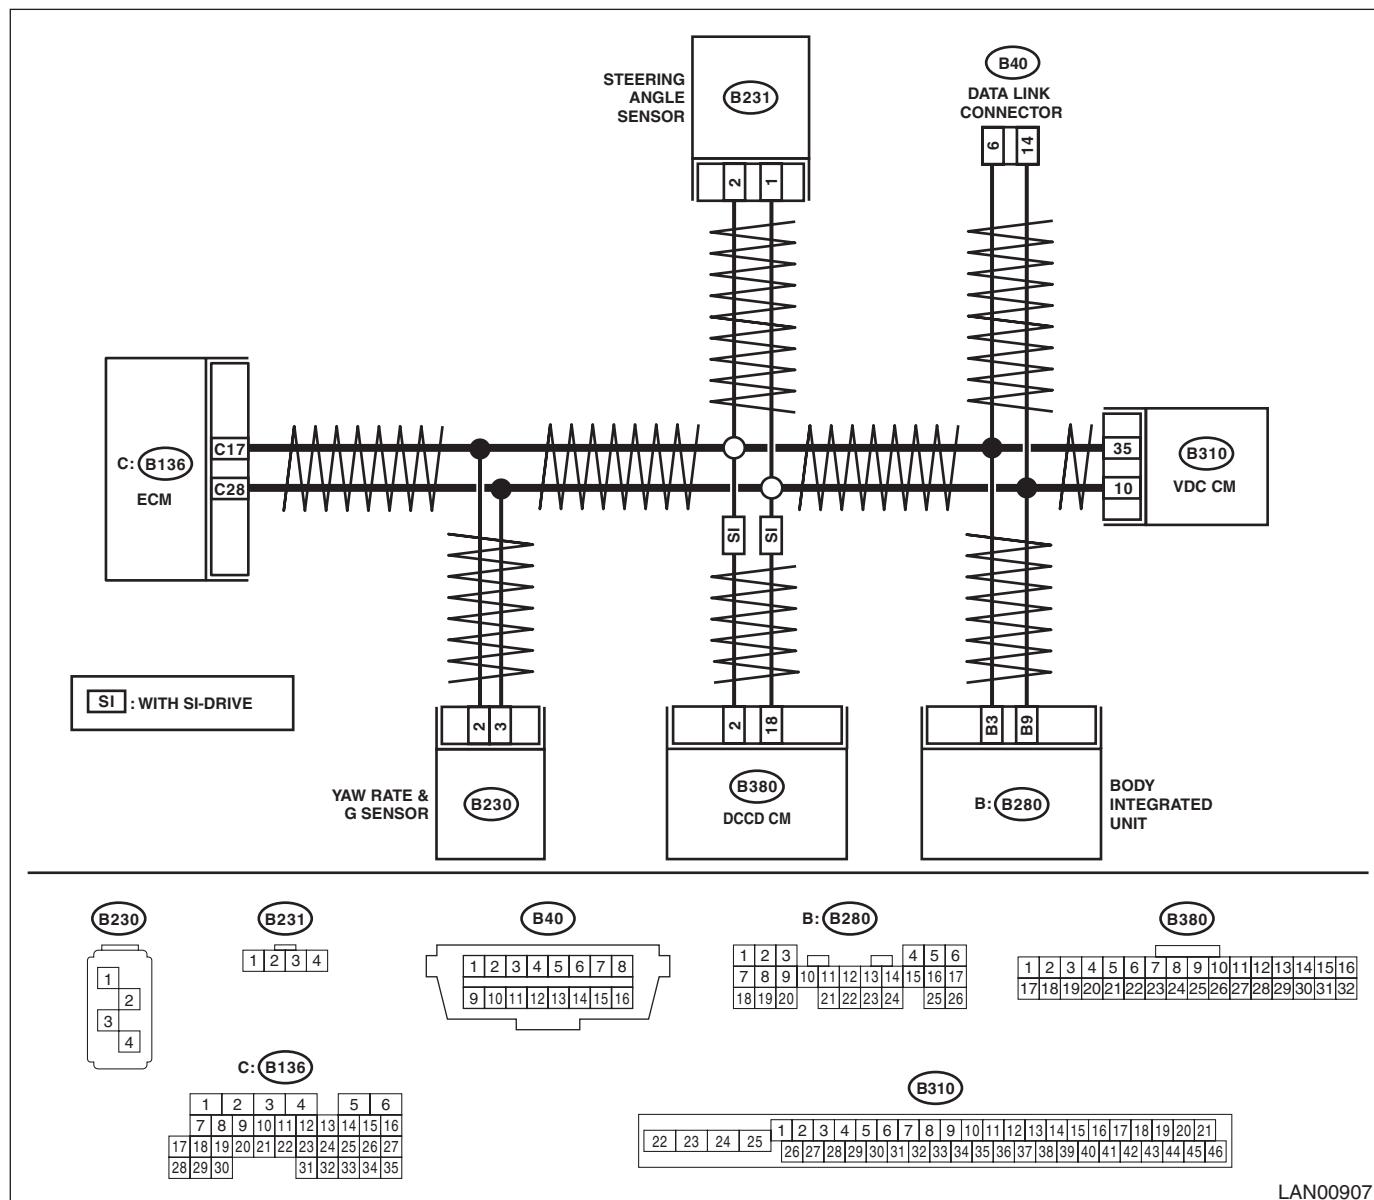

Step	Check	Yes	No
1 CHECK DTC. Read all DTCs using the Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Are there U1202 or DTCs other than for the body integrated unit?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Check DTC indicated by body integrated unit.	Is U1201 a current malfunction?	Go to step 3.	Go to step 14.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Connect all the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1201 a current malfunction?	For models without SI-DRIVE, Go to step 5. For models with SI-DRIVE, Go to step 4.	Go to step 14.
4 CHECK DCCD CM. 1) Turn the ignition switch to OFF. 2) Disconnect the DCCD CM connector (B380). 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1201 a current malfunction?	Go to step 5.	Go to step 16.
5 CHECK STEERING ANGLE SENSOR. 1) Turn the ignition switch to OFF. 2) Connect the DCCD CM connector. 3) Disconnect the steering angle sensor connector (B231). 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1201 a current malfunction?	Go to step 6.	Go to step 17.
6 CHECK YAW RATE SENSOR. 1) Turn the ignition switch to OFF. 2) Connect the steering angle sensor connector. 3) Disconnect the yaw rate sensor connector (B230). 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1201 a current malfunction?	Go to step 7.	Go to step 18.
7 CHECK VDC/ABS CM. 1) Turn the ignition switch to OFF. 2) Connect the yaw rate sensor connector. 3) Disconnect the VDC/ABS CM connector (B310). 4) Install the 120 Ω resistance to VDC/ABS CM connector terminals. <i>Terminals</i> <i>(B310) No. 10 — No. 35:</i> 5) Using the tester, measure the resistance between terminals of data link connector. <i>Terminals</i> <i>(B40) No. 6 — No. 14:</i>	Is the resistance 60 Ω?	Go to step 8.	Go to step 10.
8 CHECK DTC. 1) Turn the ignition switch to ON. 2) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1201 a current malfunction?	Go to step 9.	Go to step 10.
9 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1202 a current malfunction?	Replace the VDC/ABS CM. <Ref. to VDC-8, REMOVAL, VDC Control Module and Hydraulic Control Unit (VDCCM&H/U).>	Go to step 10.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
10 CHECK ECM. 1) Turn the ignition switch to OFF. 2) Connect the VDC/ABS CM. 3) Disconnect the ECM connector (B136). 4) Install the 120 Ω resistance to ECM connector. Terminals (B136) No. 17 — No. 28: 5) Using the tester, measure the resistance between terminals of data link connector. Connector & terminal (B40) No. 6 — No. 14:	Is the resistance 60 Ω?	Go to step 11.	Repair or replace the open circuit of harness.
11 CHECK DTC. 1) Turn the ignition switch to ON. 2) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1201 a current malfunction?	Go to step 12.	Go to step 13.
12 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1202 a current malfunction?	Replace the ECM. <Ref. to FU(STI)-59, REMOVAL, Engine Control Module (ECM).> <Ref. to FU(w/o STI)-57, REMOVAL, Engine Control Module (ECM).>	Go to step 13.
13 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Reconnect all the disconnected connectors. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1201 a current malfunction?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Go to step 14.
14 CHECK HARNESS. 1) Shake the instrument harness and bulk-head harness, rear harness. 2) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1201 a current malfunction?	Repair or replace the harness.	Go to step 15.
15 CHECK CONNECTOR. 1) Disconnect the connector used for CAN circuit. 2) Check the connector terminal.	Is there poor contact of connector terminal?	Repair the connector terminal where poor contact exists, or replace harness.	It is possible that temporary poor communication occurs.
16 CHECK HARNESS. Using the tester, check the open, short (power supply-output short, GND-output short) in the harness between data link connector and DCCD CM terminals. Connector & terminal (B40) No. 14 — (B380) No. 18: (B40) No. 6 — (B380) No. 2:	Is harness normal?	Replace the DCCD CM. <Ref. to 6MT-123, REMOVAL, Driver's Control Center Differential Control Module.>	Repair or replace the harness.
17 CHECK HARNESS. Using the tester, check for open or short (power supply-output short, GND-output short) in the harness between terminals of data link connector and steering angle sensor. Connector & terminal (B40) No. 14 — (B231) No. 1: (B40) No. 6 — (B231) No. 2:	Is harness normal?	Replace the steering angle sensor. <Ref. to VDC-22, REPLACEMENT, Steering Angle Sensor.>	Repair or replace the harness.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
18 CHECK HARNESS. Using the tester, check for open or short (power supply-output short, GND-output short) in the harness between terminals of data link connector and yaw rate sensor. <i>Connector & terminal</i> (B40) No. 14 — (B230) No. 3: (B40) No. 6 — (B230) No. 2:	Is harness normal?	Replace the yaw rate sensor. <Ref. to VDC-20, REMOVAL, Yaw Rate and G. Sensor.>	Repair or replace the harness.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

G: DTC U1202 CAN-HS BUS OFF

DTC DETECTING CONDITION:


Integrated unit communication is shut down because of high speed CAN error.

TROUBLE SYMPTOM:

Each warning light illuminates because the CAN communication (sending and receiving) is not normal.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

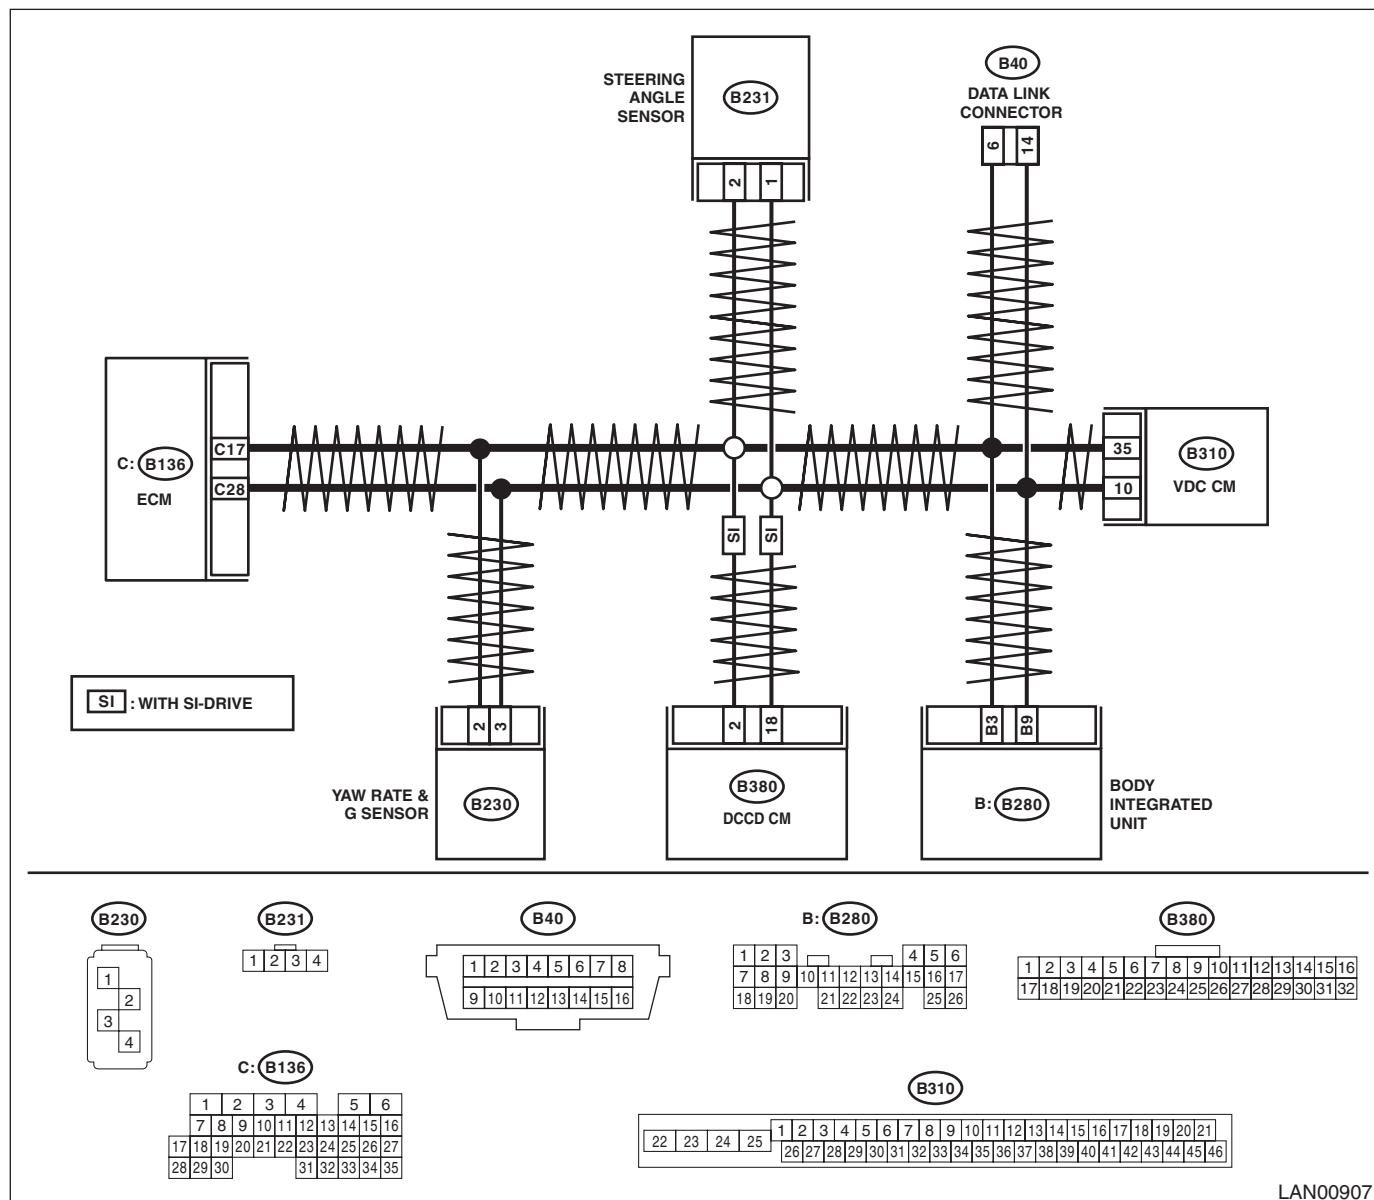

Step	Check	Yes	No
1 CHECK DTC. Using the Subaru Select Monitor, confirm all DTCs. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is any DTC other than for the body integrated unit displayed?	Perform the diagnosis according to displayed DTC.	Go to step 2.
2 CHECK DTC. 1) Turn the ignition switch to OFF → ON. 2) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1202 a current malfunction?	Go to step 3.	Go to step 10.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1202 a current malfunction?	Go to step 4.	Go to step 10.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. <i>Connector & terminal</i> <i>(B40) No. 6 — (B136) No. 17:</i> <i>(B40) No. 6 — (B310) No. 35:</i> <i>(B40) No. 6 — (B230) No. 2:</i> <i>(B40) No. 6 — (B231) No. 2:</i> <i>(B40) No. 6 — (B380) No. 2 (with SI-DRIVE):</i> <i>(B40) No. 6 — (B280) No. 3:</i>	Is harness normal?	Go to step 5.	Repair or replace the harness.
5 CHECK HARNESS. Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. <i>Connector & terminal</i> <i>(B40) No. 14 — (B136) No. 28:</i> <i>(B40) No. 14 — (B310) No. 10:</i> <i>(B40) No. 14 — (B230) No. 3:</i> <i>(B40) No. 14 — (B231) No. 1:</i> <i>(B40) No. 14 — (B380) No. 18 (with SI-DRIVE):</i> <i>(B40) No. 14 — (B280) No. 9:</i>	Is harness normal?	Go to step 6.	Repair or replace the harness.
6 CHECK ECM. 1) Connect the ECM. 2) Using the tester, measure the resistance between terminals of data link connector. <i>Connector & terminal</i> <i>(B40) No. 6 — No. 14:</i>	Is the resistance $120\pm5\ \Omega$?	Go to step 7.	Replace the ECM. <Ref. to FU(STI)-59, REMOVAL, Engine Control Module (ECM).> <Ref. to FU(w/o STI)-57, REMOVAL, Engine Control Module (ECM).>
7 CHECK VDC/ABS CM. 1) Disconnect the ECM connector (B136). 2) Connect the VDC/ABS CM. 3) Using the tester, measure the resistance between terminals of data link connector. <i>Connector & terminal</i> <i>(B40) No. 6 — No. 14:</i>	Is the resistance $120\pm5\ \Omega$?	Go to step 8.	Replace the VDC/ABS CM. <Ref. to VDC-8, REMOVAL, VDC Control Module and Hydraulic Control Unit (VDCCM&H/U).>

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
8 CHECK HARNESS. 1) Connect the disconnected connectors. 2) Using the tester, measure the resistance between terminals of data link connector and chassis ground. Connector & terminal (B40) No. 6 — Chassis ground: (B40) No. 14 — Chassis ground:	Is the resistance 1 MΩ or more?	Go to step 9.	Go to step 12.
9 CHECK HARNESS. 1) Turn the ignition switch to ON. 2) Using the tester, measure the voltage between terminals of data link connector and chassis ground. Connector & terminal (B40) No. 6 (+) — Chassis ground (-): (B40) No. 14 (+) — Chassis ground (-):	Is the voltage less than 6 V?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Go to step 13.
10 CHECK HARNESS. 1) Shake the harness. 2) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1202 a current malfunction?	Repair or replace the harness.	Go to step 11.
11 CHECK CONNECTOR. Disconnect the connector used for high speed CAN circuit.	Is there poor contact of connector terminal?	Repair the connector terminal, or replace harness.	It is possible that temporary poor communication occurs.
12 CHECK CONTROL MODULE. With the tester connected, disconnect each control module connector.	Is there any control module whose resistance has changed?	Replace the control module whose resistance has changed.	Repair or replace the open or short circuit of the harness.
13 CHECK CONTROL MODULE. With the tester connected, disconnect each control module connector.	Is there any control module whose voltage has changed?	Replace the control module whose voltage has changed.	Repair or replace the short circuit of the harness.

H: DTC U1211 CAN-HS ECM DATA ABNORMAL

DTC DETECTING CONDITION:


Received error data from ECM.

TROUBLE SYMPTOM:

It is possible that engine control error may occur.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

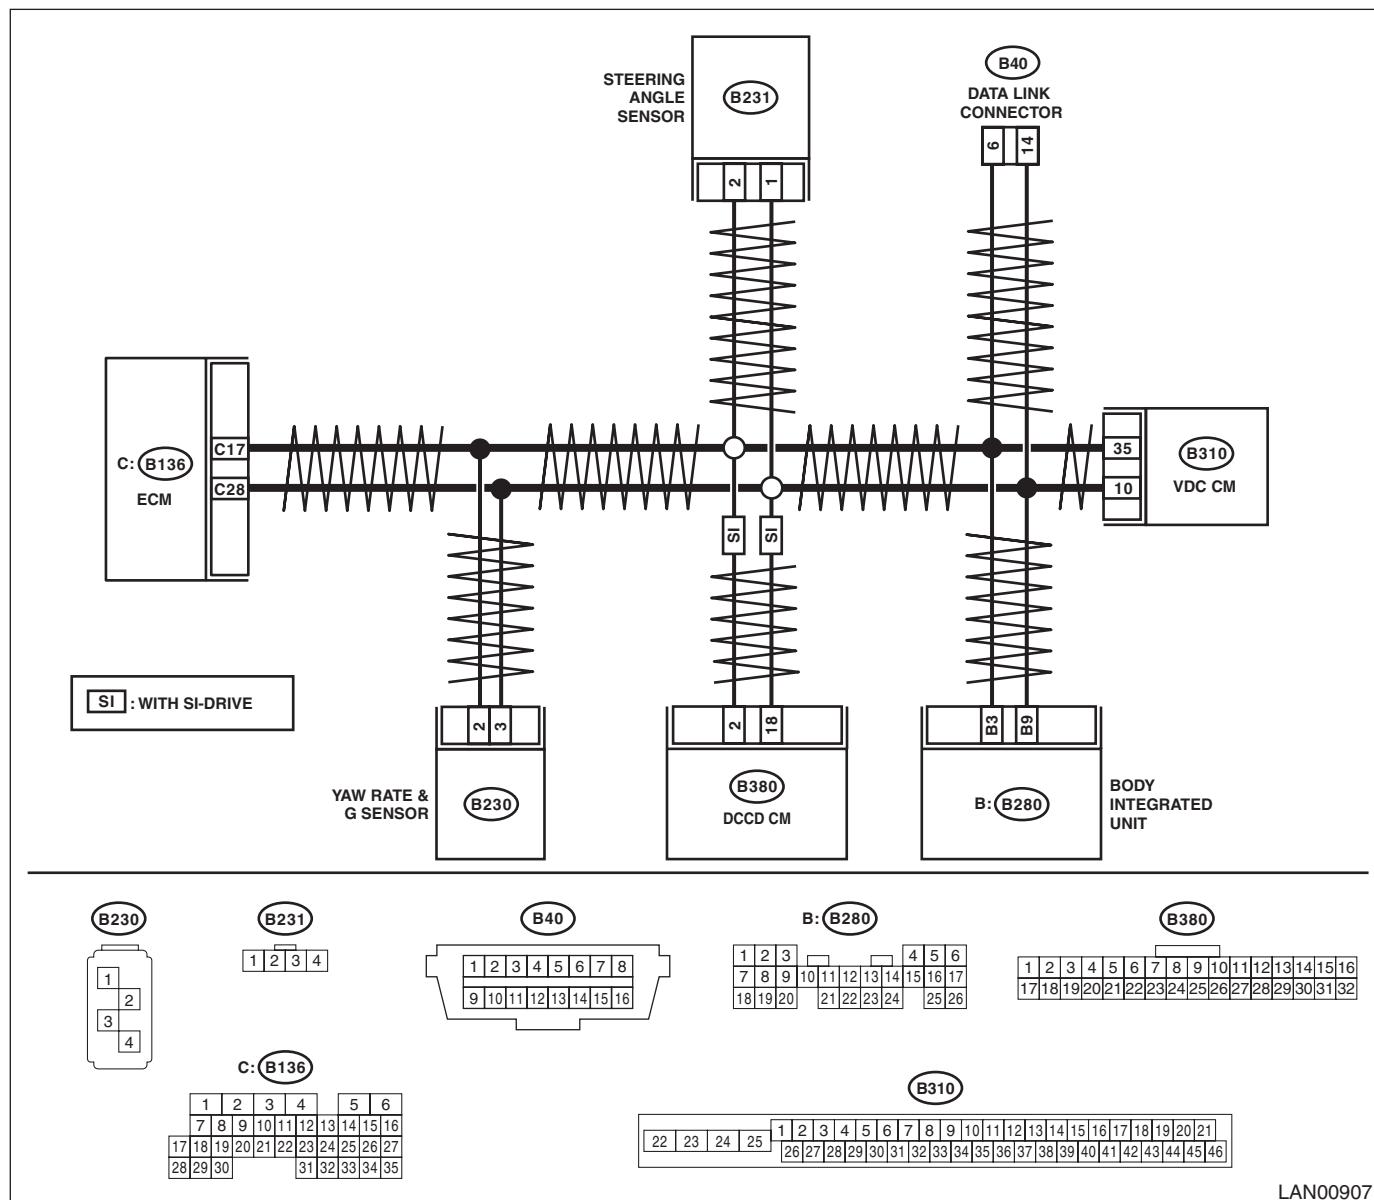

Step	Check	Yes	No
1 CHECK DTC. Read all DTCs using the Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is there DTC U1202?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1211 a current malfunction?	Go to step 3.	Go to step 4.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK ECM. 1) Turn the ignition switch to OFF. 2) Disconnect the ECM connector. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1211 a current malfunction?	Replace the ECM. <Ref. to FU(STI)-59, REMOVAL, Engine Control Module (ECM).> <Ref. to FU(w/o STI)-57, REMOVAL, Engine Control Module (ECM).>	Go to step 4.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1211 a current malfunction?	Repair the poor contact or temporary open circuit of harness.	Go to step 5.
5 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the connector that is connected to high speed CAN circuit.	Is there poor contact of connector?	Repair the connector terminal where poor contact exists, or replace harness.	It is possible that temporary poor communication occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

I: DTC U1213 CAN-HS VDC/ABS DATA ABNORMAL

DTC DETECTING CONDITION:


Received error data from VDC/ABS CM.

TROUBLE SYMPTOM:

It is possible that brake control error may occur.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

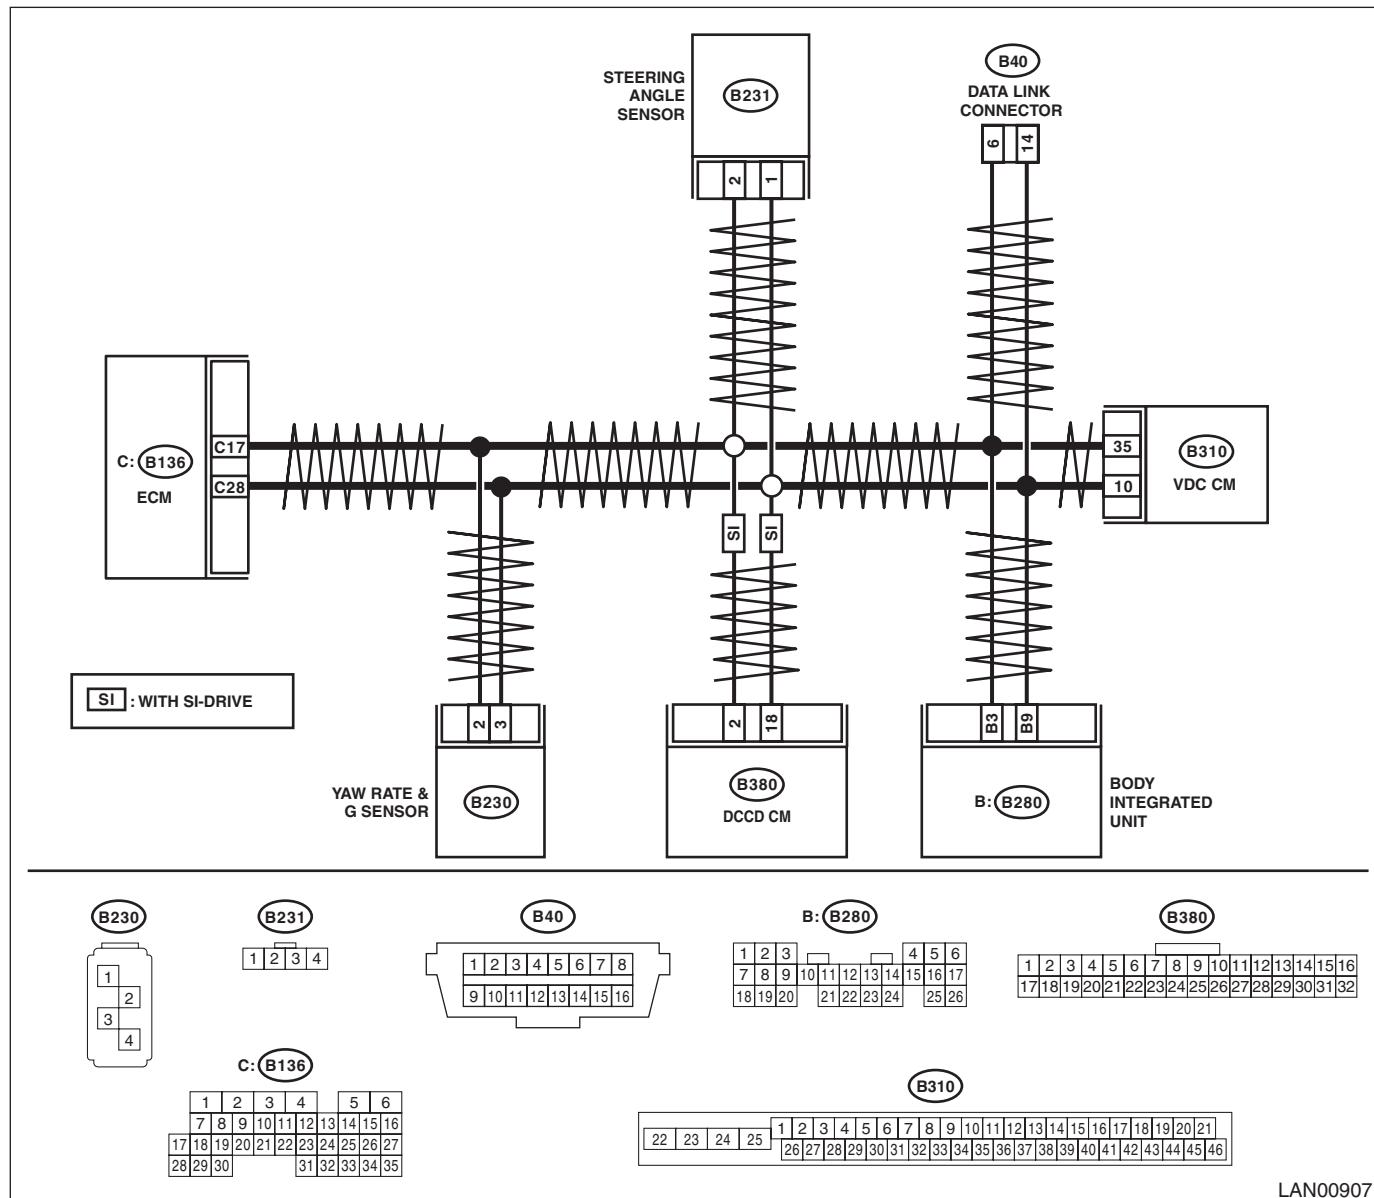

Step	Check	Yes	No
1 CHECK DTC. Read all DTCs using the Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is there DTC U1202?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1213 a current malfunction?	Go to step 3.	Go to step 4.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect the VDC/ABS CM connector. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1213 a current malfunction?	Replace the VDC/ABS CM. <Ref. to VDC-8, REMOVAL, VDC Control Module and Hydraulic Control Unit (VDCCM&H/U).>	Go to step 4.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1213 a current malfunction?	Repair or replace the harness.	Go to step 5.
5 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the connector that is connected to high speed CAN circuit.	Is there poor contact of connector terminal?	Repair the connector terminal, or replace harness.	It is possible that temporary poor communication occurs.

J: DTC U1216 HIGH-SPEED CAN (DCCD) DATA ERROR

DTC DETECTING CONDITION:


Received error data from DCCD CM.

TROUBLE SYMPTOM:

DCCD indicator blinks.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

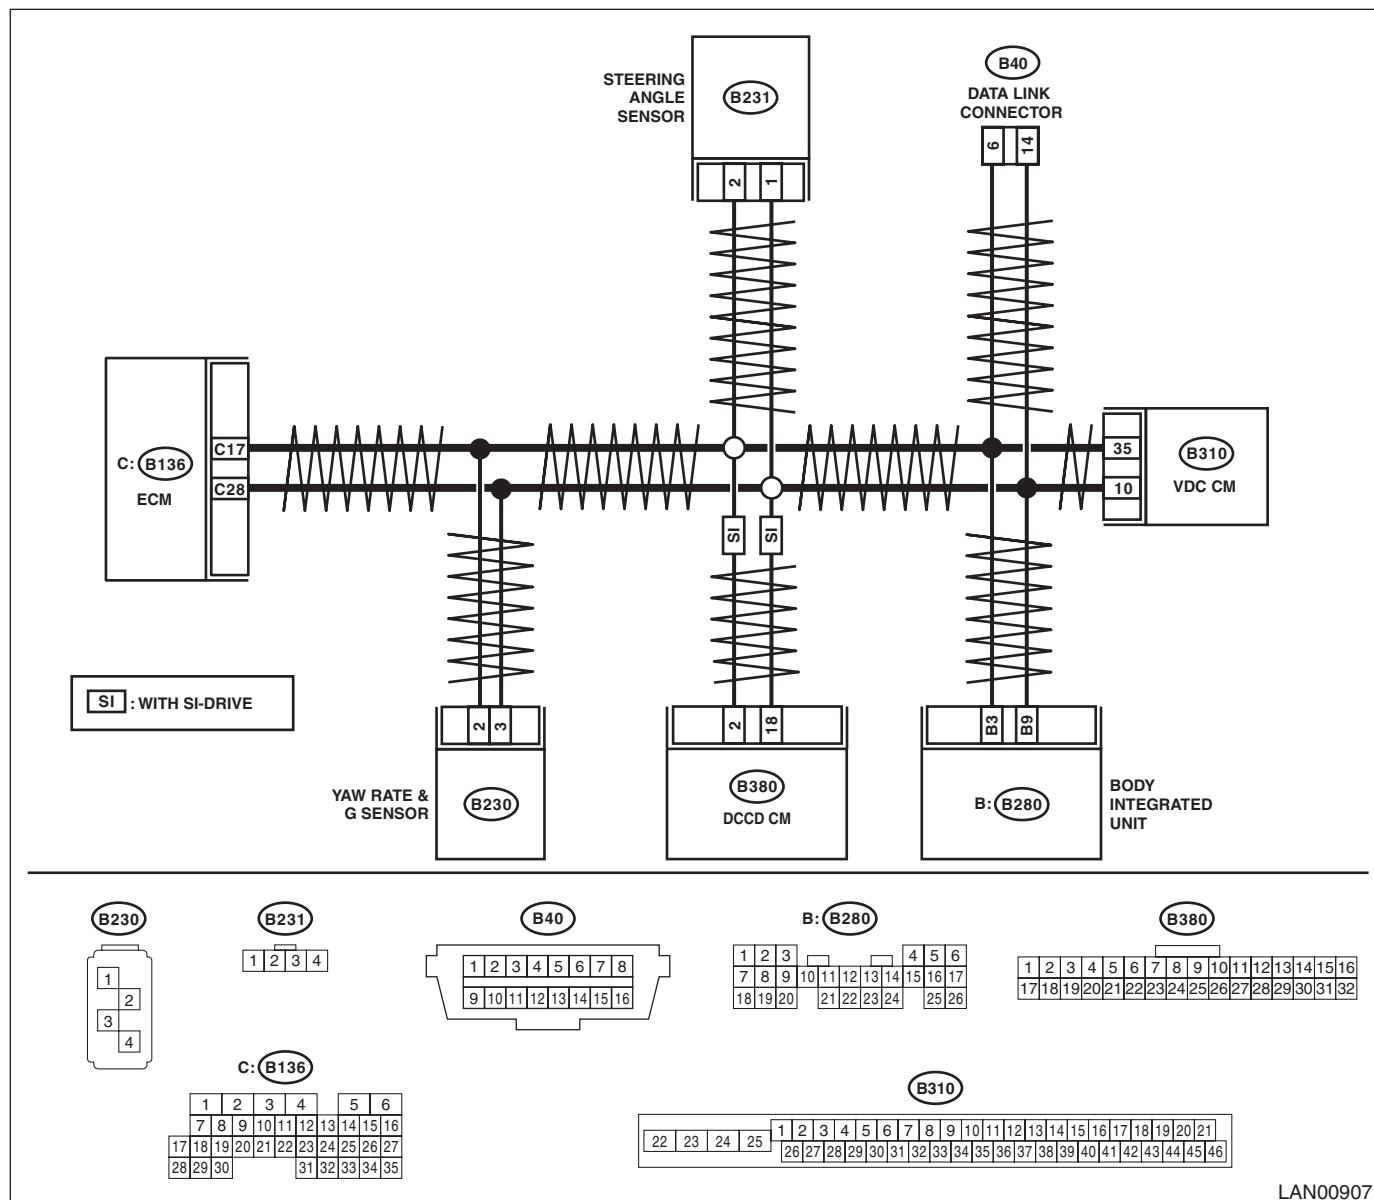

LAN00907

Step	Check	Yes	No
1 CHECK DTC. Read all DTCs using the Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is there DTC U1202?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1216 a current malfunction?	Go to step 3.	Go to step 4.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect the DCCD CM connector. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1216 a current malfunction?	Replace the DCCD CM. <Ref. to 6MT-123, REMOVAL, Driver's Control Center Differential Control Module.>	Go to step 4.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1216 a current malfunction?	Repair or replace the harness.	Go to step 5.
5 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the connector that is connected to high speed CAN circuit.	Is there poor contact of connector terminal?	Repair the connector terminal, or replace harness.	Temporary communication failure occurs.

K: DTC U1221 CAN-HS ECM NO-RECEIVE DATA

DTC DETECTING CONDITION:


Not received data from ECM.

TROUBLE SYMPTOM:

Malfunction indicator light illuminates.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

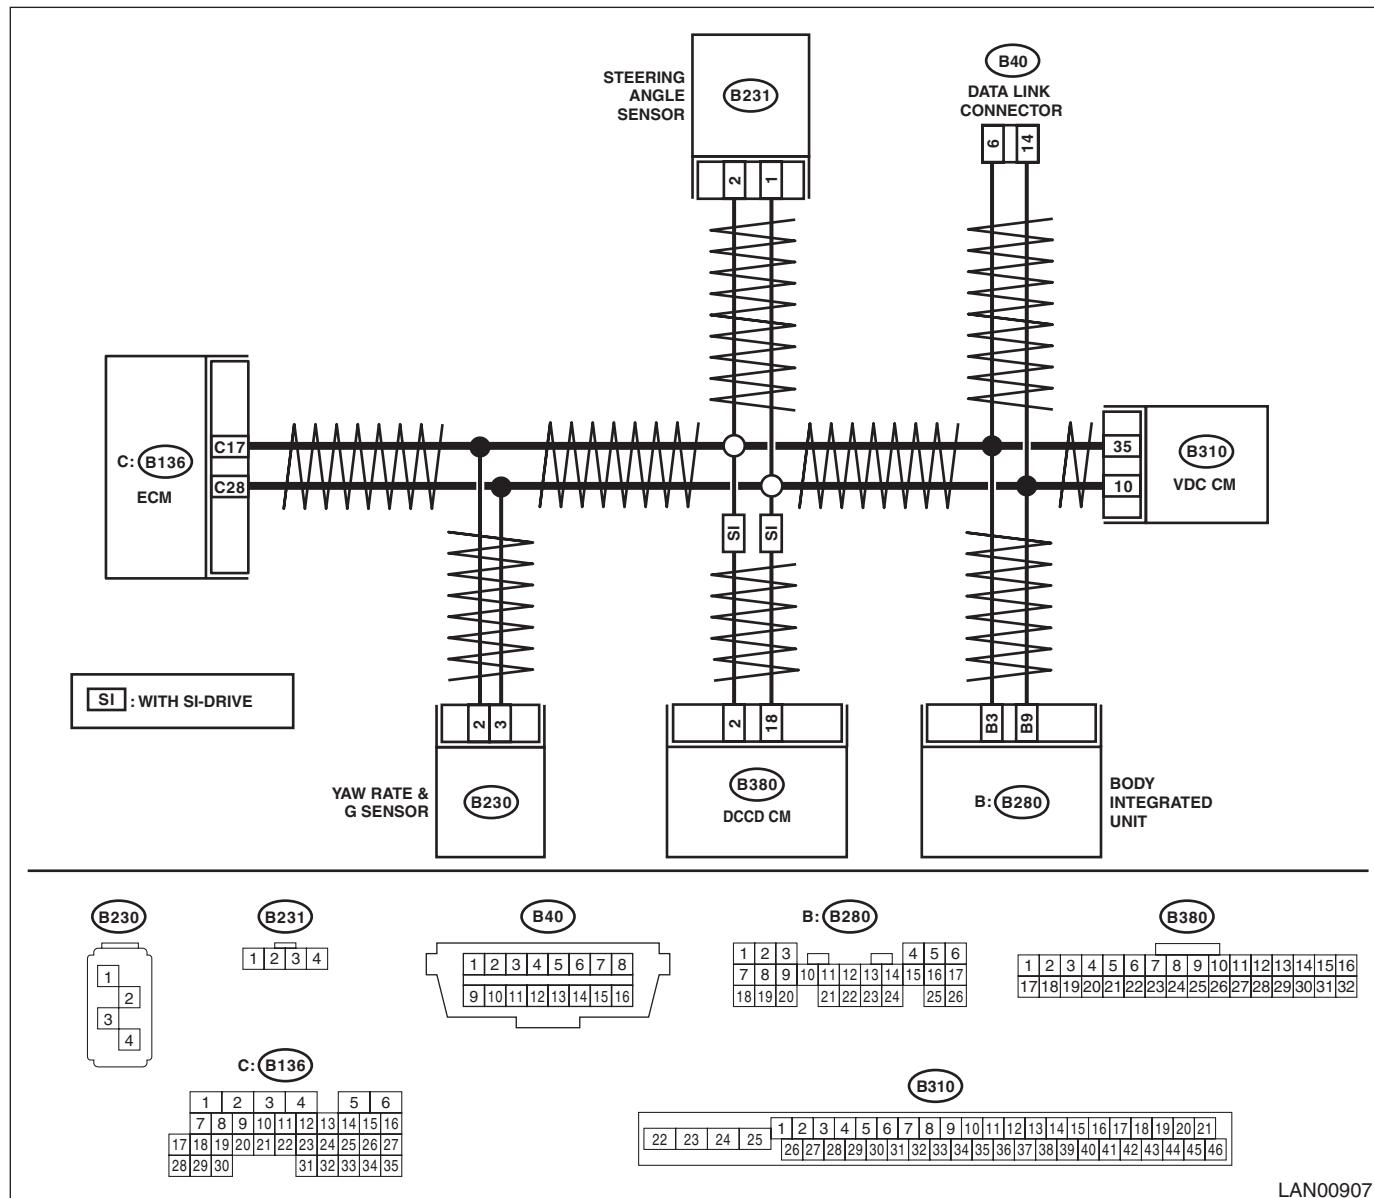

Step	Check	Yes	No
1 CHECK DTC. Read all DTCs using the Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is there DTC U1202?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1221 a current malfunction?	Go to step 3.	Go to step 8.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1221 a current malfunction?	Go to step 4.	Go to step 8.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. <i>Connector & terminal</i> <i>(B40) No. 6 — (B136) No. 17:</i> <i>(B40) No. 6 — (B310) No. 35:</i> <i>(B40) No. 6 — (B230) No. 2:</i> <i>(B40) No. 6 — (B231) No. 2:</i> <i>(B40) No. 6 — (B380) No. 2 (with SI-DRIVE):</i> <i>(B40) No. 6 — (B280) No. 3:</i>	Is harness normal?	Go to step 5.	Repair or replace the harness.
5 CHECK HARNESS. Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. <i>Connector & terminal</i> <i>(B40) No. 14 — (B136) No. 28:</i> <i>(B40) No. 14 — (B310) No. 10:</i> <i>(B40) No. 14 — (B230) No. 3:</i> <i>(B40) No. 14 — (B231) No. 1:</i> <i>(B40) No. 14 — (B380) No. 18 (with SI-DRIVE):</i> <i>(B40) No. 14 — (B280) No. 9:</i>	Is harness normal?	Go to step 6.	Repair or replace the harness.
6 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Connect the disconnected connectors. 3) Start the engine and stop. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1221 a current malfunction?	Go to step 7.	Go to step 8.
7 CHECK DTC. Read all DTCs using the Subaru Select Monitor.	Is DTC C0047 detected?	Replace the ECM. <Ref. to FU(STI)-59, REMOVAL, Engine Control Module (ECM).> <Ref. to FU(w/o STI)-57, REMOVAL, Engine Control Module (ECM).>	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
8 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1221 a current malfunction?	Repair or replace the harness.	Go to step 9 .
9 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect all the connector that is connected to high speed CAN circuit.	Is there poor contact of connector terminal?	Repair the connector terminal where poor contact exists, or replace harness.	Temporary communication failure occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

L: DTC U1223 CAN-HS VDC/ABS NO-RECEIVE DATA

DTC DETECTING CONDITION:


Not received data from VDC/ABS CM.

TROUBLE SYMPTOM:

ABS warning light and VDC warning light illuminate.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

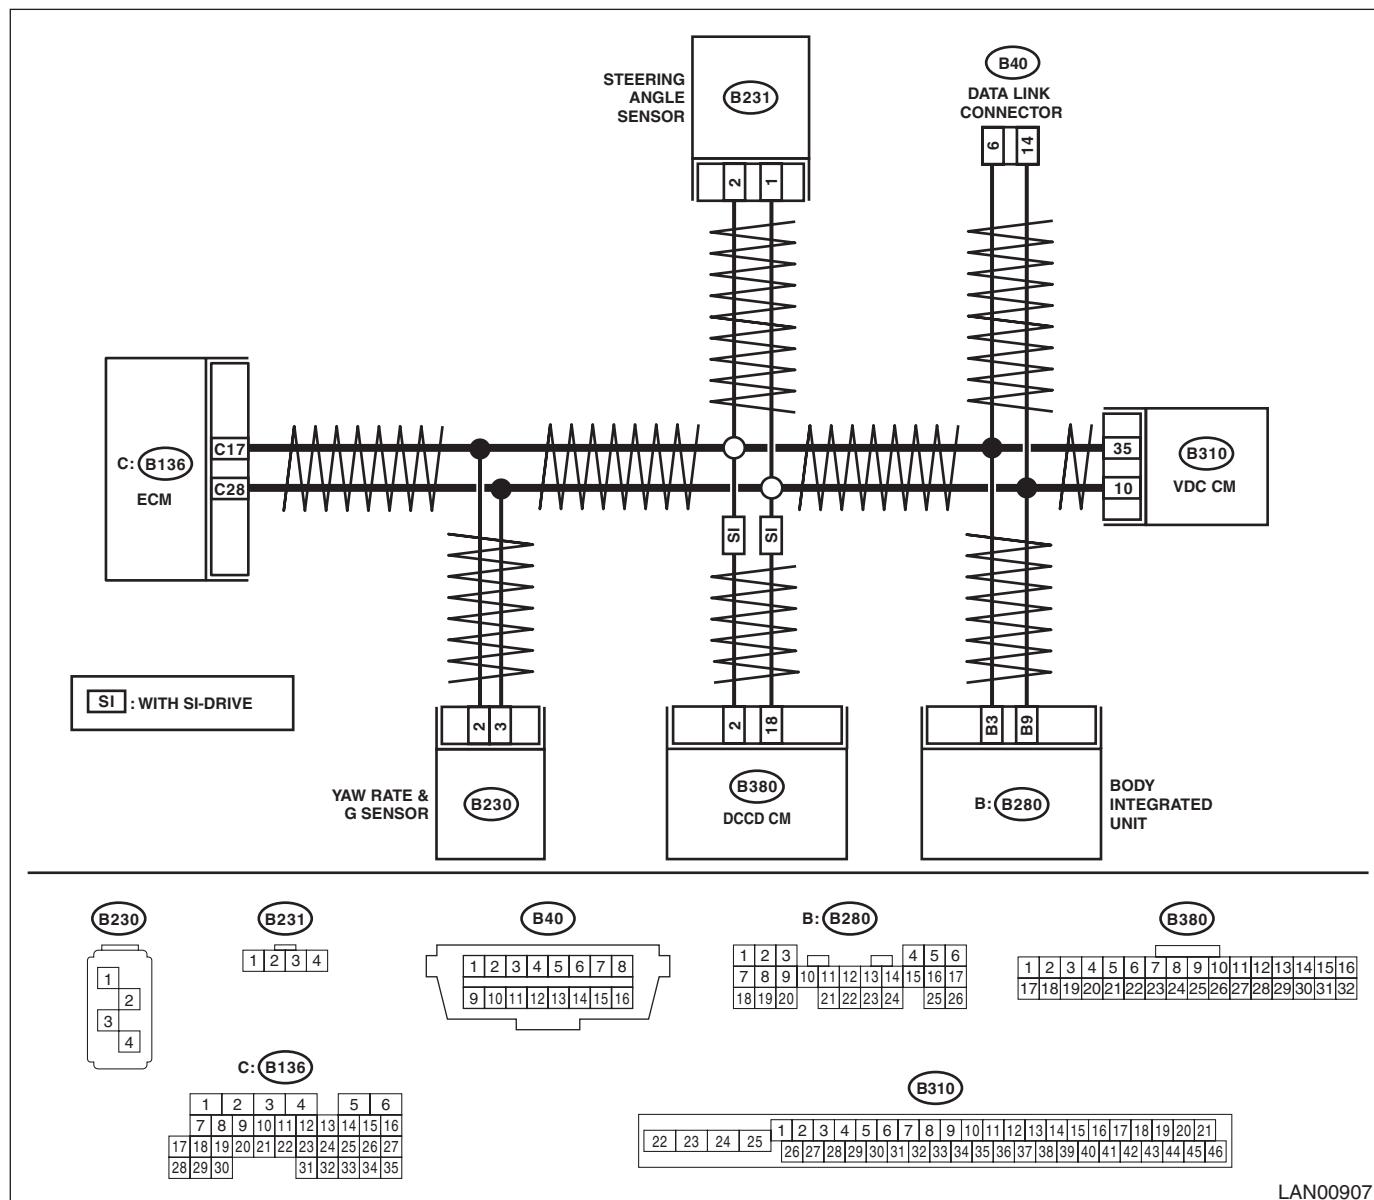

LAN00907

Step	Check	Yes	No
1 CHECK DTC. Read all DTCs using the Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is there DTC U1202?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1223 a current malfunction?	Go to step 3.	Go to step 7.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1223 a current malfunction?	Go to step 4.	Go to step 7.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. Connector & terminal (B40) No. 6 — (B310) No. 35: (B40) No. 14 — (B310) No. 10:	Is harness normal?	Go to step 5.	Repair or replace the harness.
5 CHECK DTC. 1) Connect the disconnected connectors. 2) Start the engine and stop. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1223 a current malfunction?	Go to step 6.	Go to step 7.
6 CHECK DTC. Read all DTCs using the Subaru Select Monitor.	Is U0122 displayed?	Replace the VDC/ABS CM. <Ref. to VDC-8, REMOVAL, VDC Control Module and Hydraulic Control Unit (VDCCM&H/U).>	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>
7 CHECK HARNESS. 1) Shake the harness used for CAN communication circuit. 2) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1223 a current malfunction?	Repair or replace the harness.	Go to step 8.
8 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line.	Is there connector terminal where poor contact exists?	Repair the connector terminal where poor contact exists, or replace harness.	Temporary poor contact occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

M: DTC U1226 HIGH-SPEED CAN (DCCD) DATA IS NOT RECEIVED

DTC DETECTING CONDITION:


Not received data from DCCD CM.

TROUBLE SYMPTOM:

DCCD indicator blinks.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

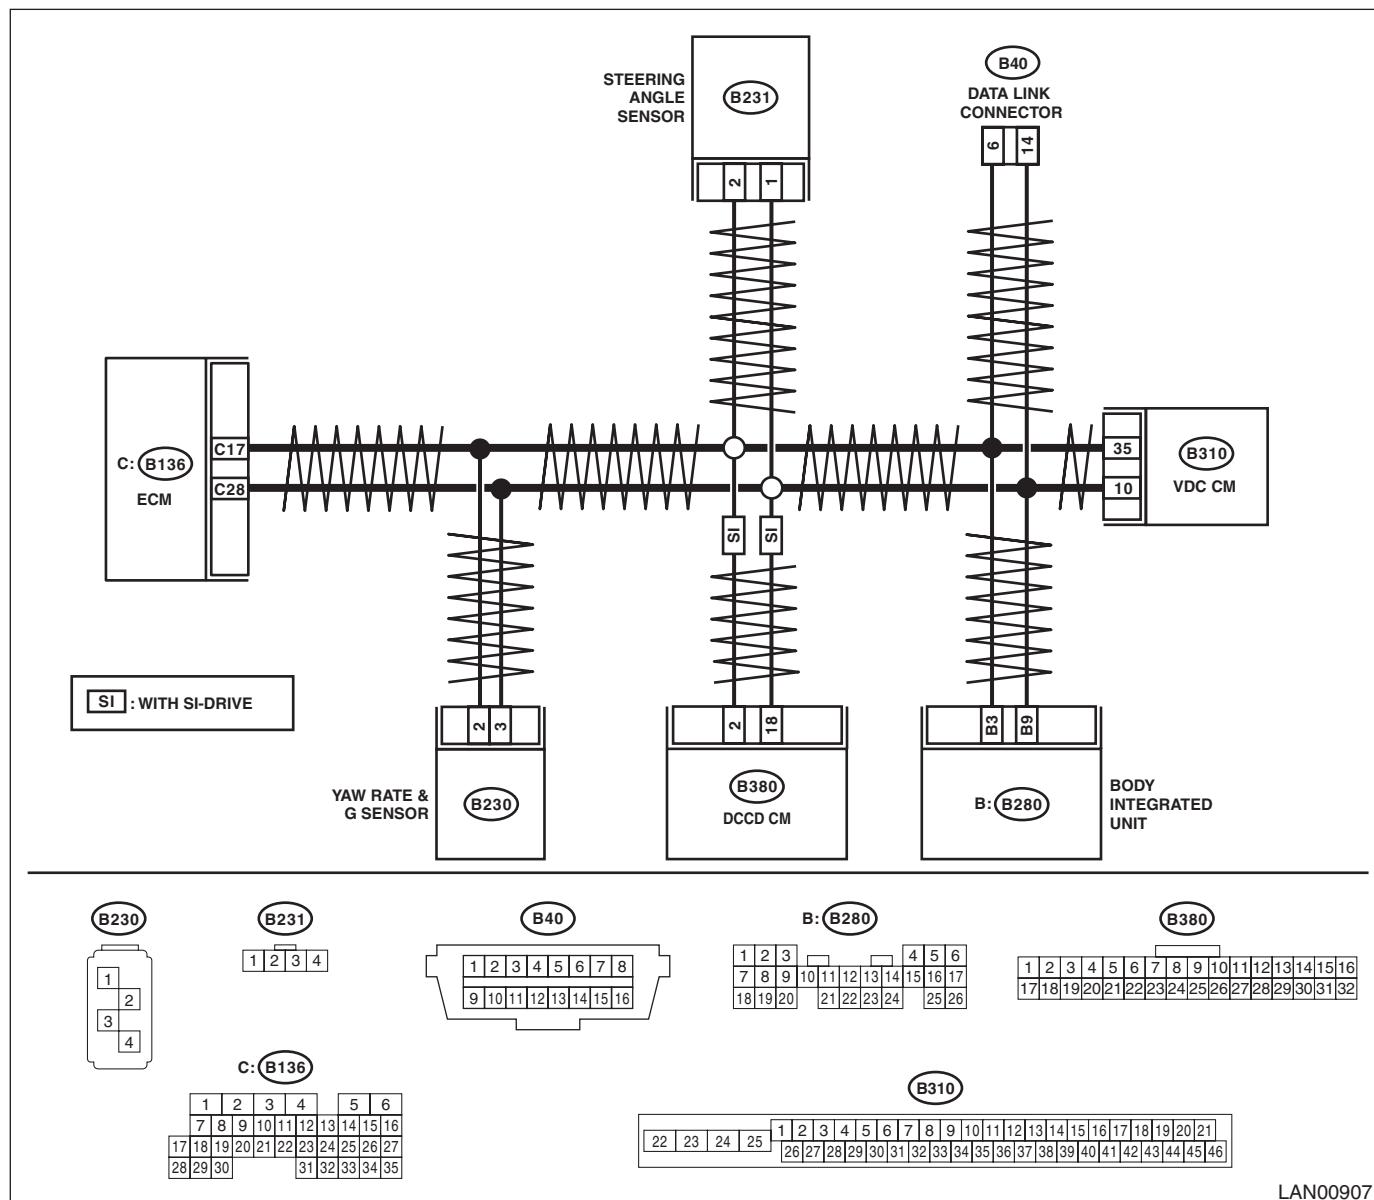

LAN00907

Step	Check	Yes	No
1 CHECK DTC. Read all DTCs using the Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is there DTC U1202?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1226 a current malfunction?	Go to step 3.	Go to step 7.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1226 a current malfunction?	Go to step 4.	Go to step 7.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (B280, B310, B136, B230, B231, B380) that are connected to high speed CAN communication line. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. Connector & terminal (B380) No. 18 — (B40) No. 14: (B380) No. 2 — (B40) No. 6:	Is harness normal?	Go to step 5.	Repair or replace the harness.
5 CHECK DTC. 1) Connect the disconnected connectors. 2) Start the engine and stop. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1226 a current malfunction?	Go to step 6.	Go to step 7.
6 CHECK DCCD CM. 1) Turn the ignition switch to OFF. 2) Replace with a DCCD CM that is operating normally. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1226 a current malfunction?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Replace the DCCD CM. <Ref. to 6MT-123, REMOVAL, Driver's Control Center Differential Control Module.>
7 CHECK HARNESS. 1) Shake the harness used for CAN communication circuit. 2) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1226 a current malfunction?	Repair or replace the harness.	Go to step 8.
8 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect all the connector that is connected to high speed CAN circuit.	Is there poor contact of connector terminal?	Repair the connector terminal where poor contact exists, or replace harness.	Temporary communication failure occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

N: DTC U1300 CAN-LS MALFUNCTION

DTC DETECTING CONDITION:


Open or short in low speed CAN circuit

TROUBLE SYMPTOM:

Low speed CAN communication can not be executed normally.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

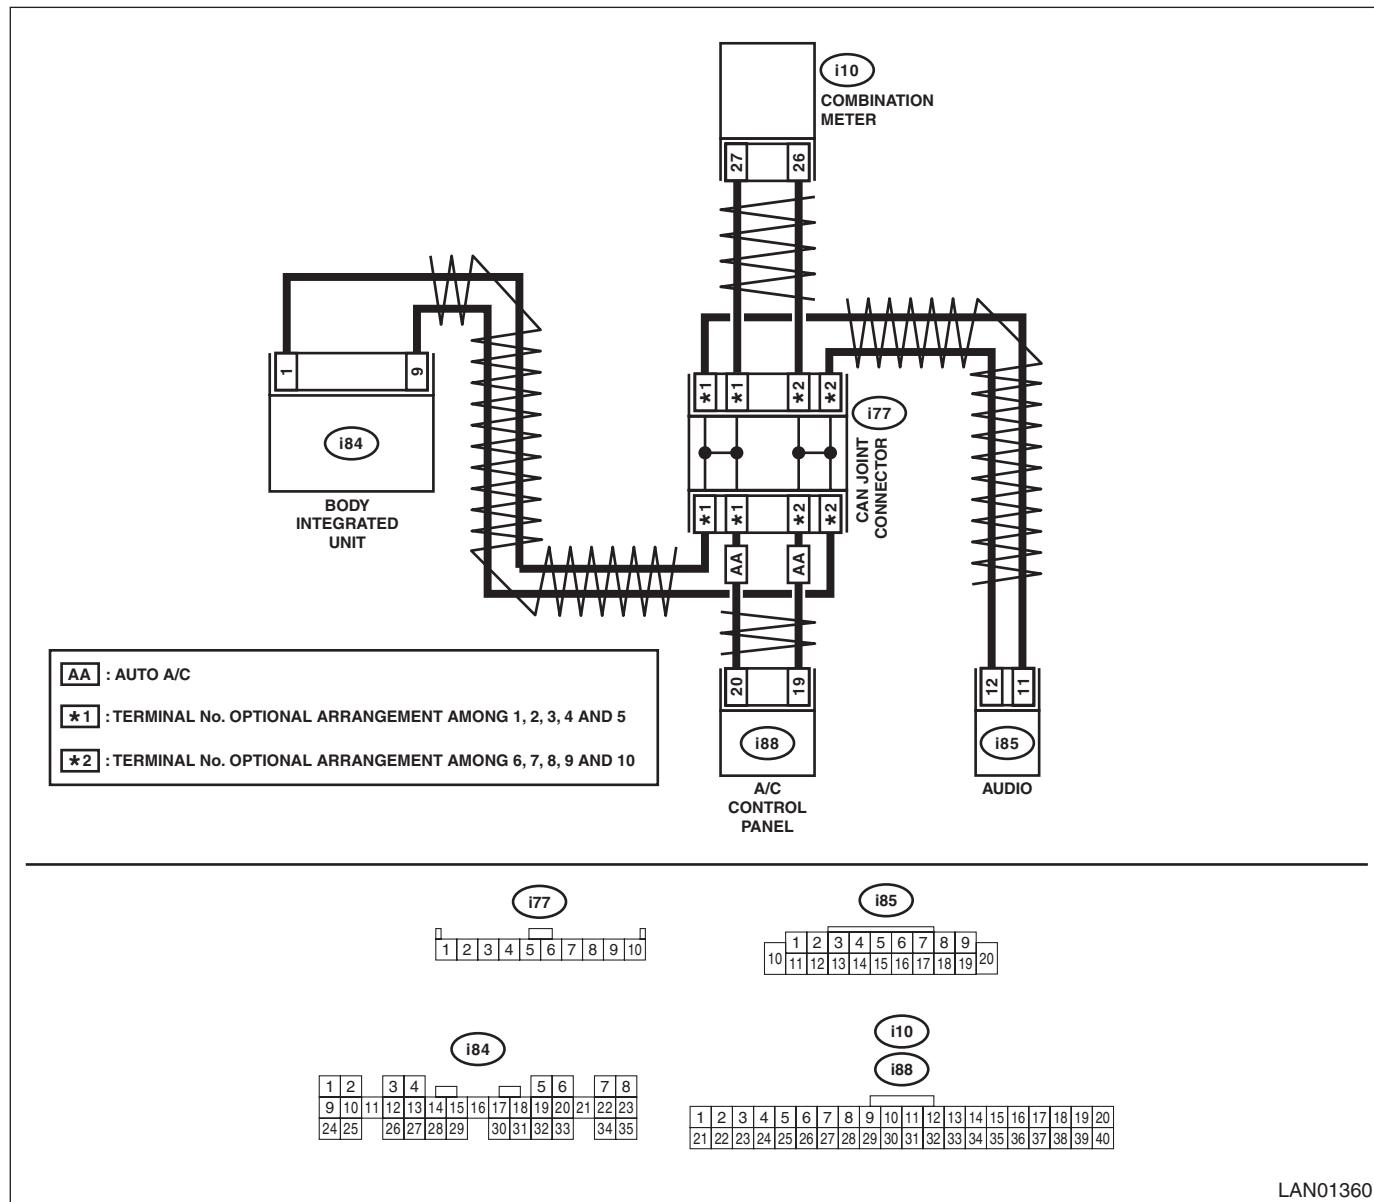

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is U1300 a current malfunction?	Go to step 2.	Go to step 7.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
2 CHECK DTC. 1) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 2) Connect the disconnected connectors. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1300 a current malfunction?	Go to step 3.	Go to step 7.
3 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. Connector & terminal <i>(i84) No. 1 — (i10) No. 27 (combination meter):</i> <i>(i84) No. 9 — (i10) No. 26 (combination meter):</i> <i>(i84) No. 1 — (i88) No. 20 (auto A/C):</i> <i>(i84) No. 9 — (i88) No. 19 (auto A/C):</i> <i>(i84) No. 1 — (i85) No. 12 (audio):</i> <i>(i84) No. 9 — (i85) No. 11 (audio):</i>	Is harness normal?	Go to step 4.	Repair or replace the harness.
4 CHECK AUDIO. 1) Connect the disconnected connectors. 2) Disconnect the connector of audio (i85). 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1300 a current malfunction?	Go to step 5.	Replace the audio. <Ref. to ET-6, REMOVAL, Audio.>
5 CHECK AUTO A/C CONTROL MODULE. 1) Turn the ignition switch to OFF. 2) Connect the audio connector. 3) Disconnect the auto A/C control module connector (i88). 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1300 a current malfunction?	Go to step 6.	Replace the auto A/C control module. <Ref. to AC-31, REMOVAL, Control Unit (Auto A/C Model).>
6 CHECK BODY INTEGRATED UNIT. 1) Turn the ignition switch to OFF. 2) Connect the auto A/C control module. 3) Replace the body integrated unit of your vehicle with the body integrated unit from other vehicle, which is working normally. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1300 a current malfunction?	Replace the combination meter. <Ref. to IDI-16, REMOVAL, Combination Meter.>	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>
7 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1300 a current malfunction?	Repair or replace the harness.	Go to step 8.
8 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the connector that is connected to low speed CAN circuit.	Is there poor contact at disconnected connector?	Repair the connector terminal, or replace harness.	Temporary communication failure occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

O: DTC U1301 CAN-LS COUNTER ABNORMAL

DTC DETECTING CONDITION:


Communication is unstable because of low speed CAN communication error.

TROUBLE SYMPTOM:

Display error may occur in fuel gauge because the CAN communication is not transmitted (sending/receiving) normally.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

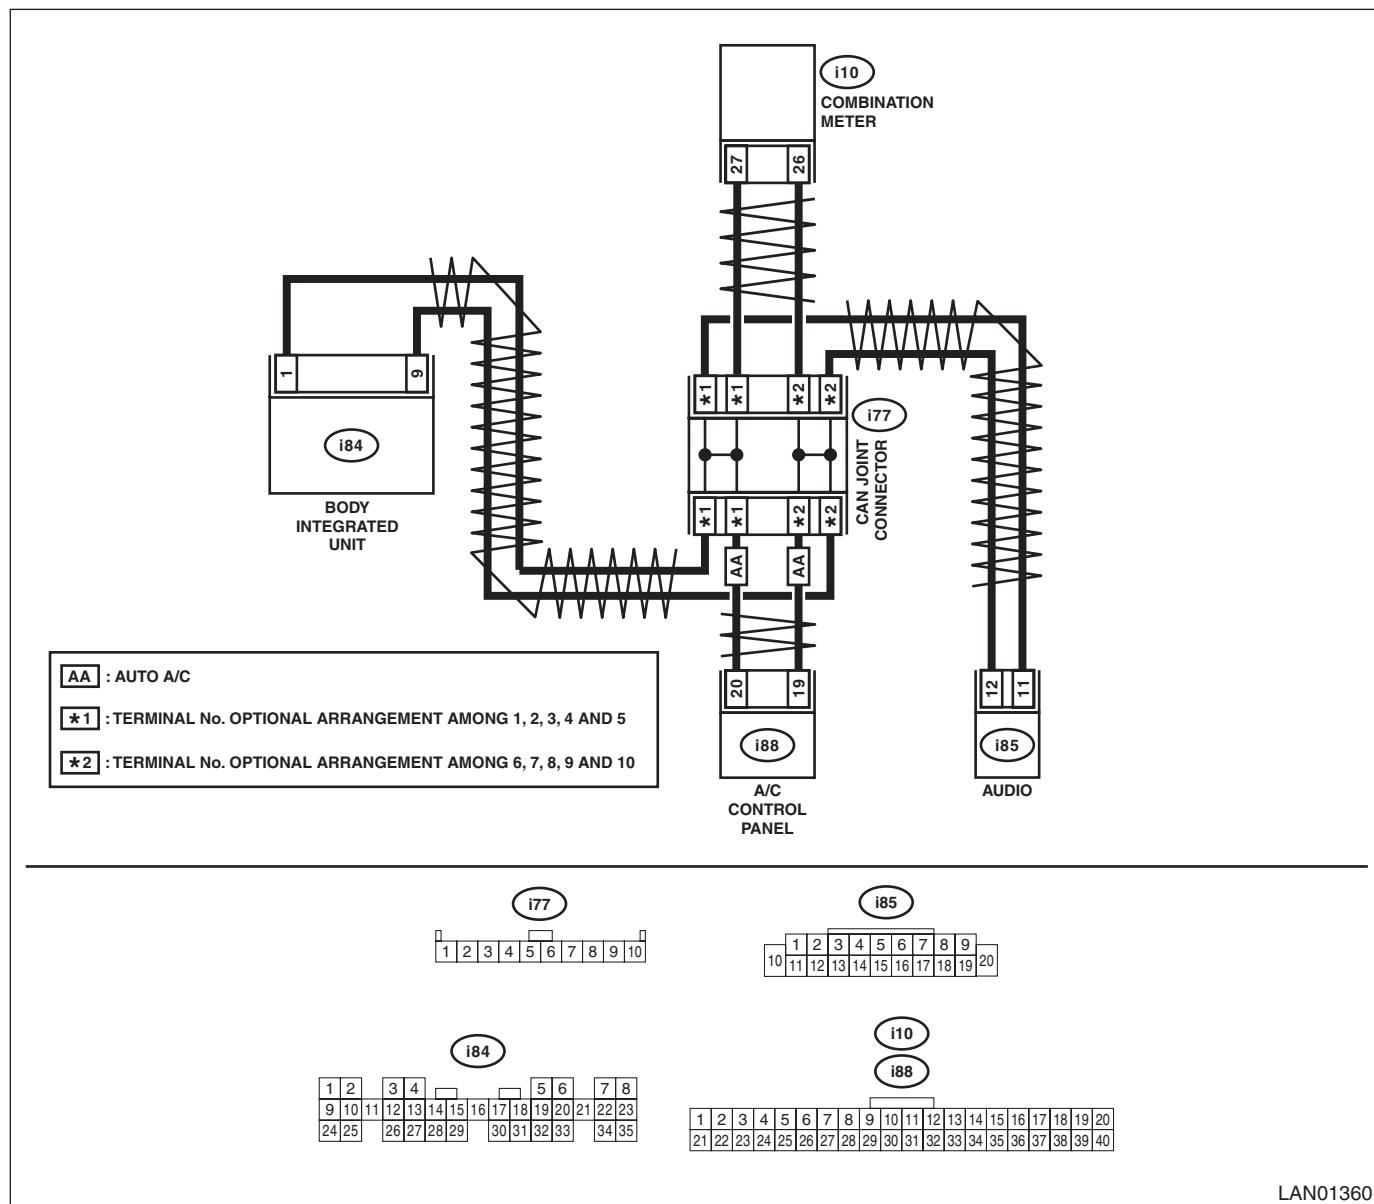

LAN01360

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Are there DTC U1300 or U1302?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1301 a current malfunction?	Go to step 3.	Go to step 9.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1301 a current malfunction?	Go to step 4.	Go to step 9.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. Connector & terminal (i84) No. 1 — (i10) No. 27 (combination meter): (i84) No. 9 — (i10) No. 26 (combination meter): (i84) No. 1 — (i88) No. 20 (auto A/C): (i84) No. 9 — (i88) No. 19 (auto A/C): (i84) No. 1 — (i85) No. 12 (audio): (i84) No. 9 — (i85) No. 11 (audio):	Is harness normal?	Go to step 5.	Repair or replace the harness.
5 CHECK AUDIO. 1) Connect the disconnected connectors. 2) Disconnect the connector of audio (i85). 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1301 a current malfunction?	Go to step 6.	Replace the audio. <Ref. to ET-6, REMOVAL, Audio.>
6 CHECK AUTO A/C CONTROL MODULE. 1) Turn the ignition switch to OFF. 2) Connect the audio unit. 3) Disconnect the auto A/C control module connector (i88). 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1301 a current malfunction?	Go to step 7.	Replace the auto A/C control module. <Ref. to AC-31, REMOVAL, Control Unit (Auto A/C Model).>
7 CHECK COMBINATION METER. 1) Turn the ignition switch to OFF. 2) Connect the disconnected connectors. 3) Perform the self-diagnosis of combination meter. <Ref. to IDI-5, SELF-DIAGNOSIS, INSPECTION, Combination Meter System.>	Is the self-diagnosis of combination meter OK?	Go to step 8.	Replace the combination meter. <Ref. to IDI-16, REMOVAL, Combination Meter.>
8 CHECK BODY INTEGRATED UNIT. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1301 a current malfunction?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Go to step 9.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
9 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for low speed CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1301 a current malfunction?	Repair or replace the harness.	Go to step 10 .
10 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line.	Is there poor contact of connector terminal?	Repair the connector terminal, or replace harness.	Temporary communication failure occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

P: DTC U1302 CAN-LS BUS OFF

DTC DETECTING CONDITION:


Integrated unit communication is shut down because of low speed CAN error.

TROUBLE SYMPTOM:

Display error may occur in fuel gauge because the CAN communication is not transmitted (sending/receiving) normally.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

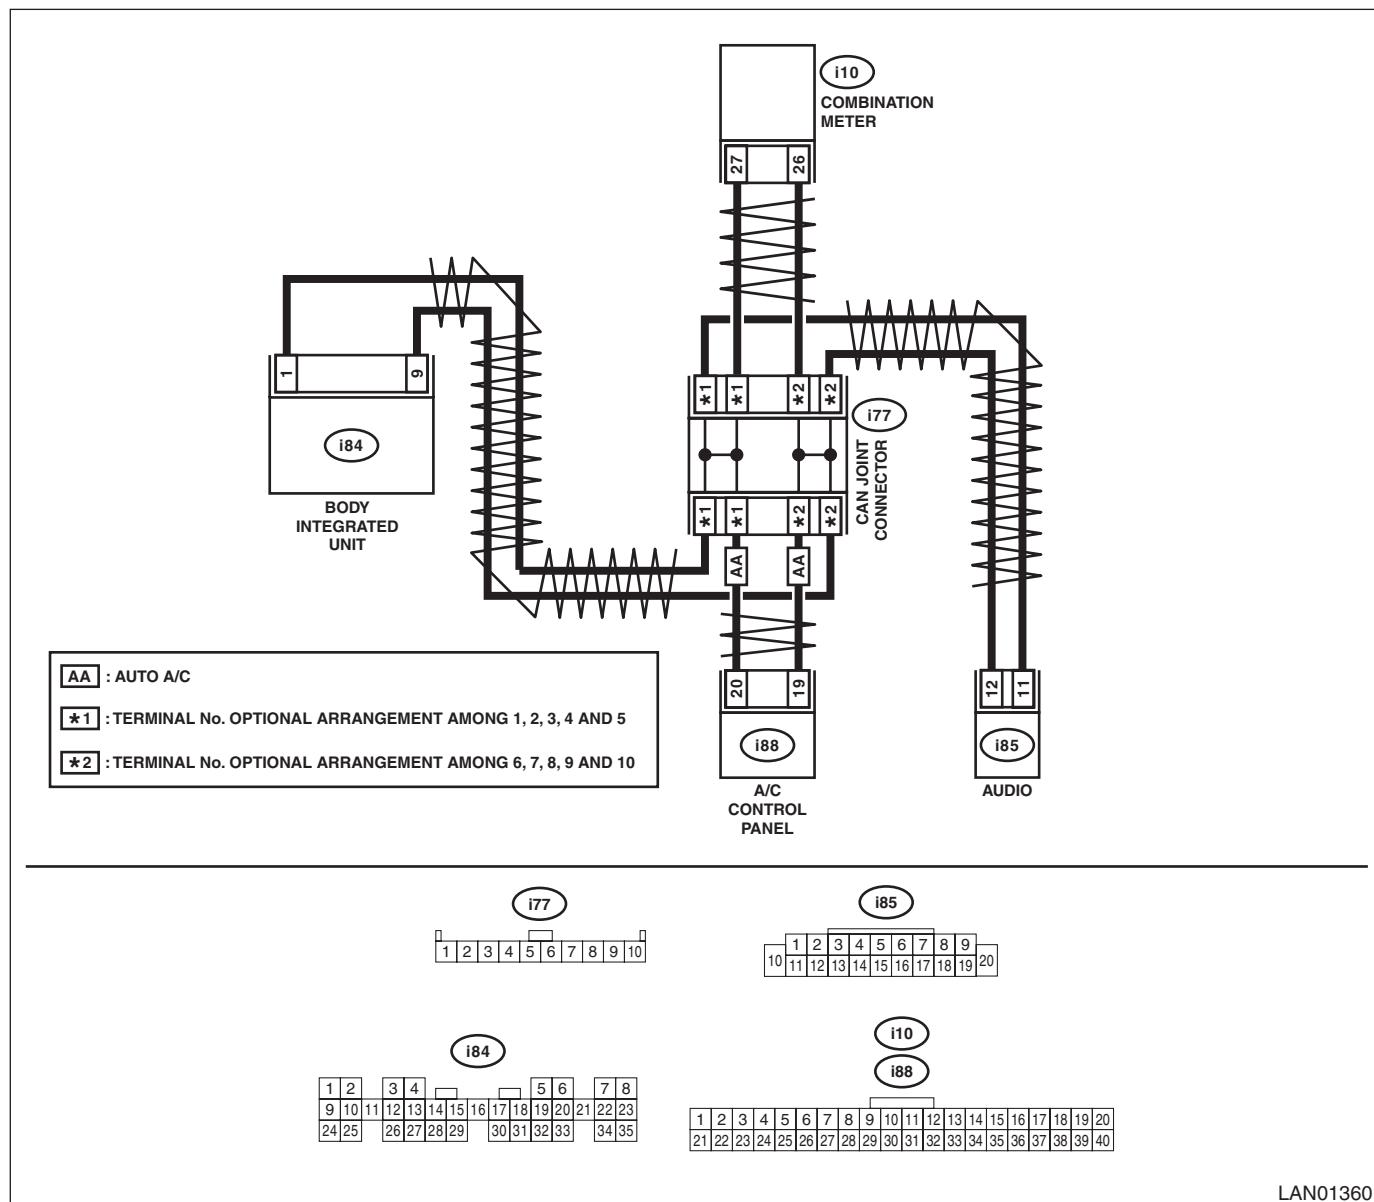

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is U1302 a current malfunction?	Go to step 2.	Go to step 8.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
2 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1302 a current malfunction?	Go to step 3.	Go to step 8.
3 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. <i>Connector & terminal</i> <i>(i84) No. 1 — (i10) No. 27 (combination meter):</i> <i>(i84) No. 9 — (i10) No. 26 (combination meter):</i> <i>(i84) No. 1 — (i88) No. 20 (auto A/C):</i> <i>(i84) No. 9 — (i88) No. 19 (auto A/C):</i> <i>(i84) No. 1 — (i85) No. 12 (audio):</i> <i>(i84) No. 9 — (i85) No. 11 (audio):</i>	Is harness normal?	Go to step 4.	Repair or replace the harness.
4 CHECK HARNESS. 1) Connect the disconnected connectors. 2) Using the tester, measure the resistance between harness connector and chassis ground. <i>Connector & terminal</i> <i>(i84) No. 1 — Chassis ground:</i> <i>(i84) No. 9 — Chassis ground:</i>	Is the resistance 1 MΩ or more?	Go to step 5.	Go to step 7.
5 CHECK HARNESS. 1) Turn the ignition switch to ON. 2) Using the tester, measure the voltage between harness connector and chassis ground. <i>Connector & terminal</i> <i>(i84) No. 1 (+) — Chassis ground (-):</i> <i>(i84) No. 9 (+) — Chassis ground (-):</i>	Is the voltage less than 6 V?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Go to step 6.
6 CHECK HARNESS. With the tester connected, disconnect control module.	Is there any control module whose voltage has changed?	Replace the control module whose voltage has changed.	Repair or replace the short circuit of the harness.
7 CHECK HARNESS. With the tester connected, disconnect control module.	Is there any control module whose resistance has changed?	Replace the control module whose resistance has changed.	Repair or replace the short circuit of the harness.
8 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for low speed CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1302 a current malfunction?	Repair or replace the open, short circuit of the harness.	Go to step 9.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
9 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line.	Is there poor contact of connector terminal?	Repair the connector terminal, or replace harness.	Temporary communication failure occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Q: DTC U1311 CAN-LS METER UNIT DATA ABNORMAL

DTC DETECTING CONDITION:


Received error data from meter.

TROUBLE SYMPTOM:

Defective data from combination meter occurs.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

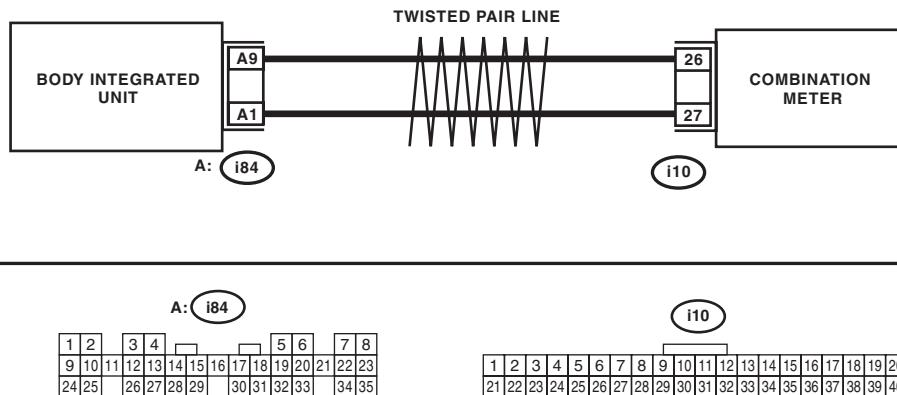

LAN00292

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is DTC U1300 or U1302 displayed?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1311 a current malfunction?	Go to step 3.	Go to step 4.
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect the combination meter connector (i10). 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1311 a current malfunction?	Replace the combination meter. <Ref. to IDI-16, REMOVAL, Combination Meter.>	Go to step 4.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for low speed CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1311 a current malfunction?	Repair or replace the harness.	Go to step 5.
5 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line.	Is there poor contact of connector terminal?	Repair the connector terminal, or replace harness.	Temporary communication failure occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

R: DTC U1321 CAN-LS METER NO-RECEIVE DATA

DTC DETECTING CONDITION:


Not received data from meter.

TROUBLE SYMPTOM:

Engine may not be started.

WIRING DIAGRAM:

CAN communication system <Ref. to WI-171, WIRING DIAGRAM, CAN Communication System.>

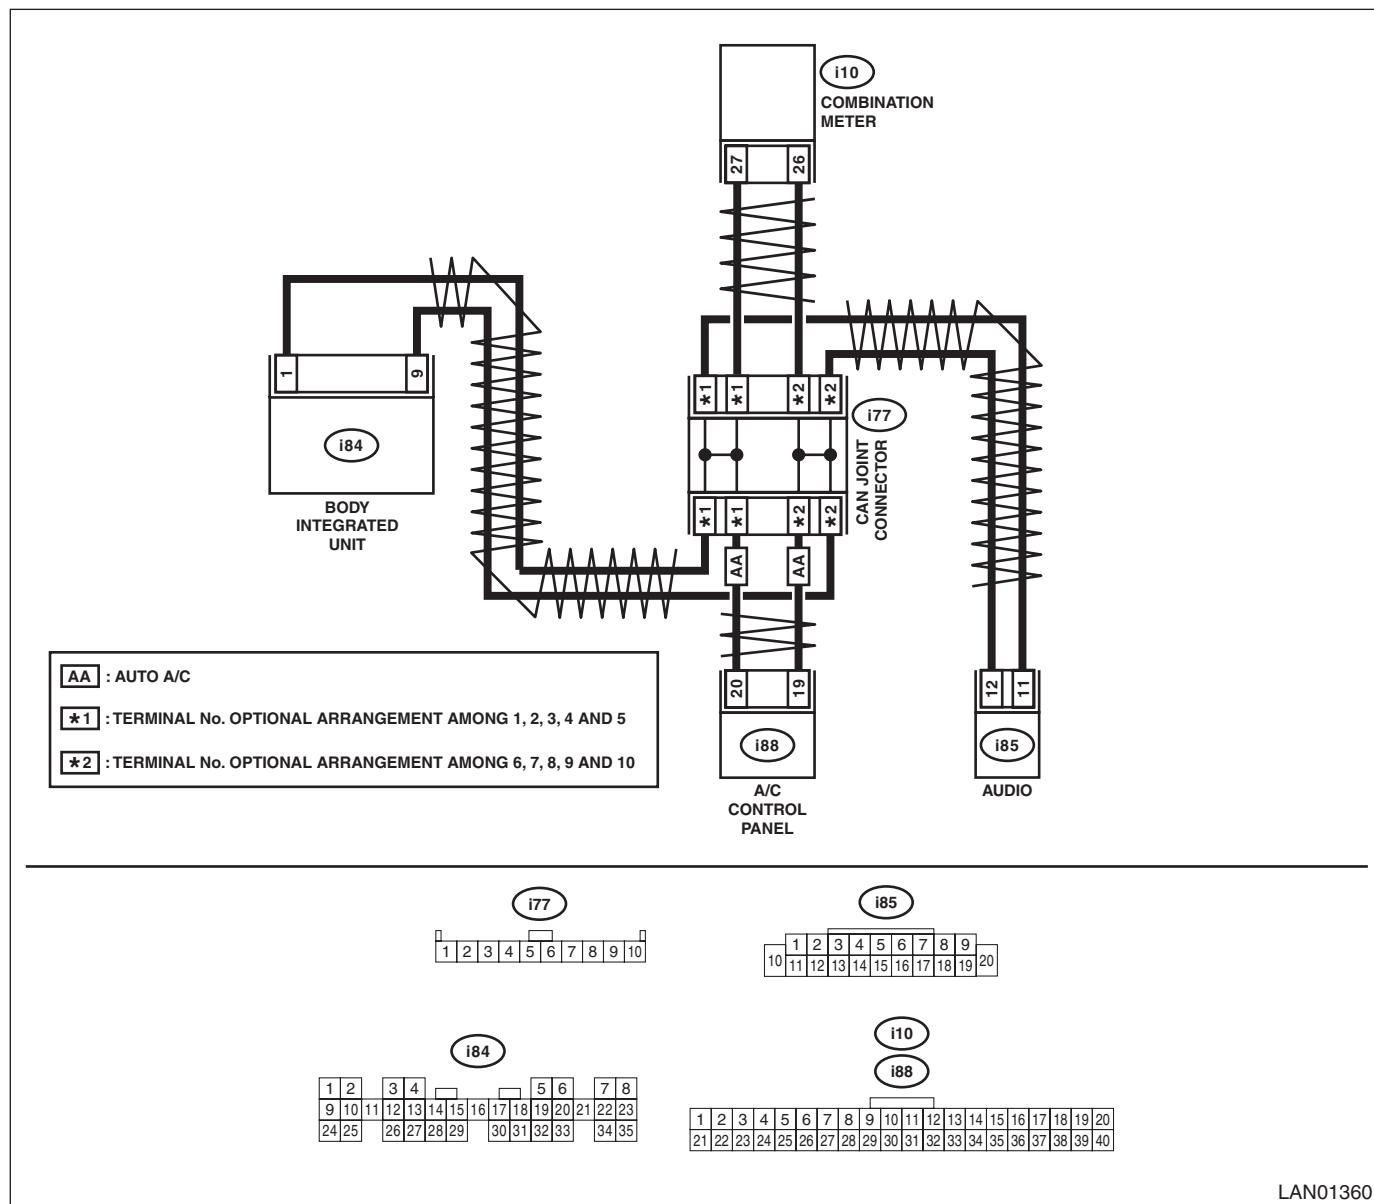

Step	Check	Yes	No
1 CHECK ALL DTCS. Read all DTCs using the Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is U1300 or U1302 displayed?	Perform the diagnosis according to DTC.	Go to step 2.
2 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1321 a current malfunction?	Go to step 3.	Go to step 7.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
3 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1321 a current malfunction?	Go to step 4.	Go to step 7.
4 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. <i>Connector & terminal</i> <i>(i84) No. 1 — (i10) No. 27 (combination meter):</i> <i>(i84) No. 9 — (i10) No. 26 (combination meter):</i> <i>(i84) No. 1 — (i88) No. 20 (auto A/C):</i> <i>(i84) No. 9 — (i88) No. 19 (auto A/C):</i> <i>(i84) No. 1 — (i85) No. 12 (audio):</i> <i>(i84) No. 9 — (i85) No. 11 (audio):</i>	Is harness normal?	Go to step 5.	Repair or replace the harness.
5 CHECK COMBINATION METER. 1) Connect the disconnected connectors. 2) Perform the self-diagnosis of combination meter. <Ref. to IDI-5, SELF-DIAGNOSIS, INSPECTION, Combination Meter System.>	Is the self diagnosis normal?	Go to step 6.	Replace the combination meter. <Ref. to IDI-16, REMOVAL, Combination Meter.>
6 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1321 a current malfunction?	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>	Go to step 7.
7 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Shake the harness used for low speed CAN communication circuit. 3) Turn the ignition switch to ON. 4) Read the DTC of body integrated unit using Subaru Select Monitor.	Is U1321 a current malfunction?	Repair the poor contact, open circuit of harness or replace harness.	Go to step 8.
8 CHECK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect all control module connectors (i84, i10, i88, i85) that are connected to low speed CAN communication line.	Is there poor contact of connector terminal?	Repair the connector terminal, or replace harness.	It is possible that temporary poor communication occurs.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

S: DTC B1500 KEYLESS UART COM. MALFUNCTION

DTC DETECTING CONDITION:


Open or short circuit in keyless UART circuit

TROUBLE SYMPTOM:

Door lock does not operate with keyless.

WIRING DIAGRAM:

Keyless entry system <Ref. to WI-159, WIRING DIAGRAM, Keyless Entry System.>

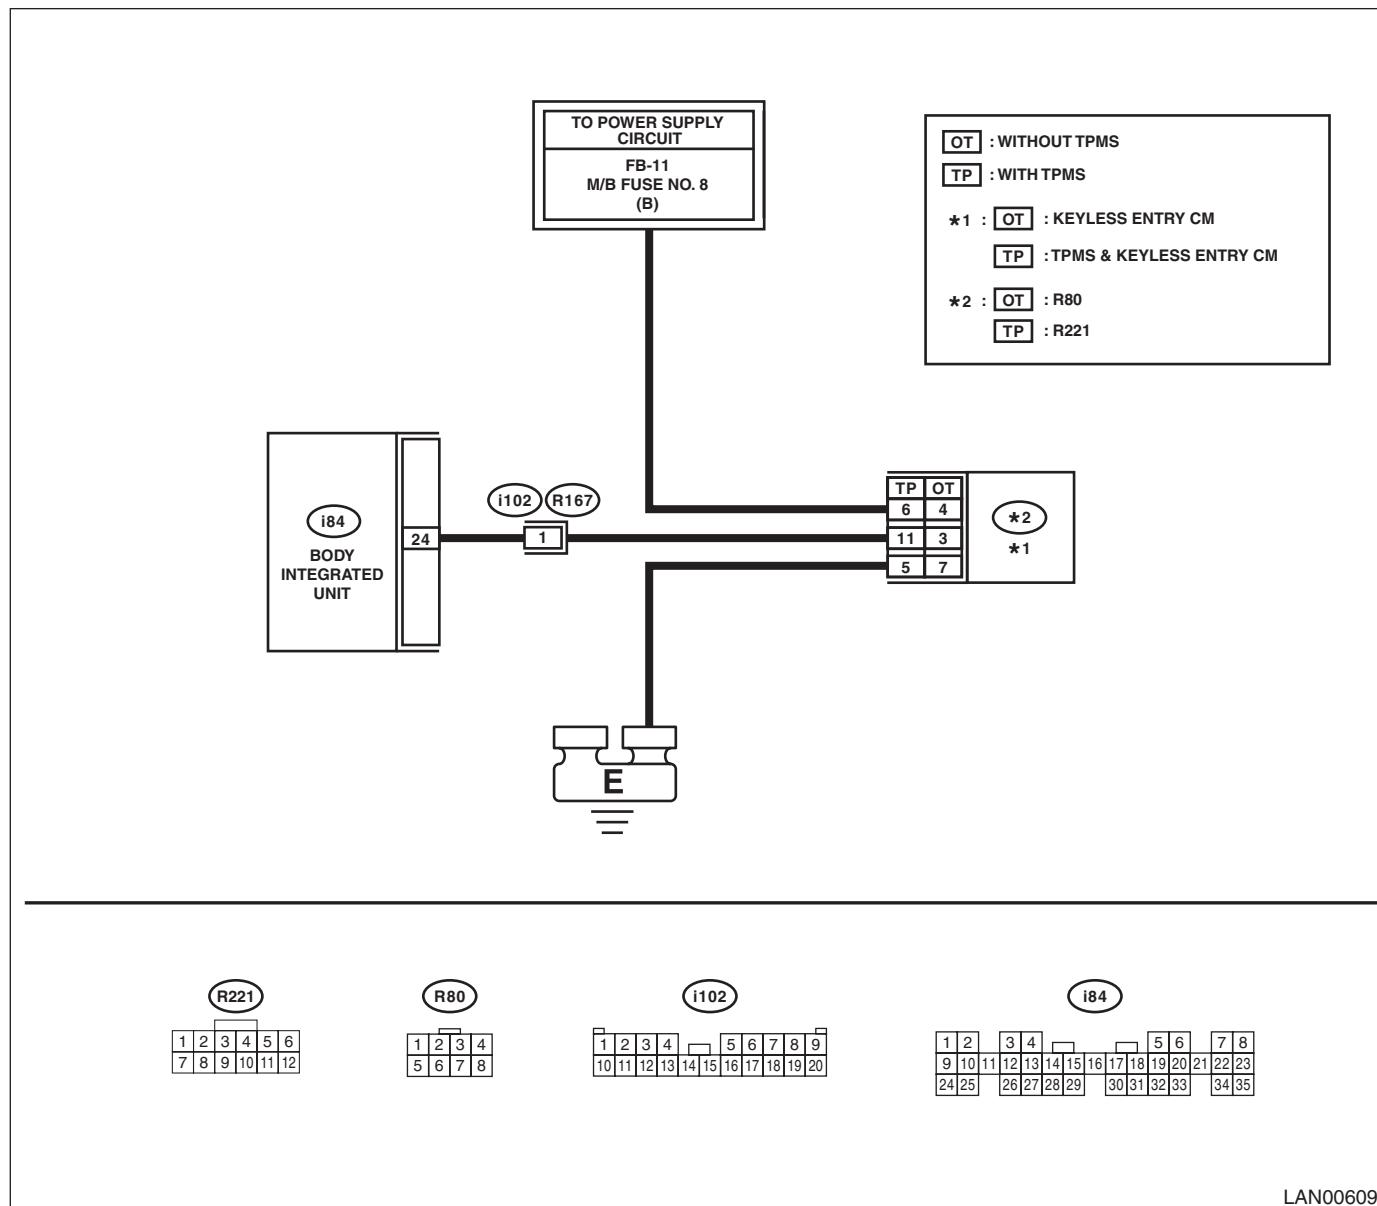

Step	Check	Yes	No
1 CHECK DTC. Read the DTC of body integrated unit using Subaru Select Monitor. <Ref. to LAN(diag)-13, READ DIAGNOSTIC TROUBLE CODE (DTC), OPERATION, Subaru Select Monitor.>	Is B1500 current malfunction?	Go to step 2.	Go to step 7.

Diagnostic Procedure with Diagnostic Trouble Code (DTC)

LAN SYSTEM (DIAGNOSTICS)

Step	Check	Yes	No
2 CHECK DTC. 1) Turn the ignition switch to OFF. 2) Disconnect the connectors from body integrated unit and keyless entry control module. 3) Connect the disconnected connectors. 4) Turn the ignition switch to ON. 5) Read the DTC of body integrated unit using Subaru Select Monitor.	Is B1500 current malfunction?	Go to step 3.	Go to step 7.
3 CHECK HARNESS. 1) Turn the ignition switch to OFF. 2) Disconnect the connectors from body integrated unit and keyless entry control module. 3) Using the tester, check for open, short (power supply-output short, GND-output short) in the harness. Connector & terminal Keyless entry CM (i84) No. 24 — (R80) No. 3: TPMS & keyless entry CM (i84) No. 24 — (R221) No. 11:	Is harness normal?	Go to step 4.	Repair or replace the harness.
4 CHECK HARNESS. Using the tester, measure the voltage between keyless entry control module and chassis ground. Connector & terminal Keyless entry CM (R80) No. 4 (+) — Chassis ground (-): TPMS & keyless entry CM (R221) No. 6 (+) — Chassis ground (-):	Is the voltage battery voltage?	Go to step 5.	Check the power supply circuit for keyless entry control module.
5 CHECK HARNESS. Using the tester, measure the resistance between keyless entry control module and chassis ground. Connector & terminal Keyless entry CM (R80) No. 7 — Chassis ground : TPMS & keyless entry CM (R221) No. 5 — Chassis ground :	Is the resistance less than 10 Ω?	Go to step 6.	Repair or replace the open circuit of harness.
6 CHECK OPERATION. 1) Install the keyless entry control module from other vehicle, which is working normally. 2) Register the keyless key which is working normally. 3) Operate the keyless key.	Does the door locking operate?	Replace the keyless entry control module. <Ref. to SL-46, REMOVAL, Keyless Entry Control Module.>	Replace the body integrated unit. <Ref. to SL-48, REMOVAL, Body Integrated Unit.>
7 CHECK CONNECTOR. Disconnect the connectors from body integrated unit and keyless entry control module.	Is there poor contact of connector?	Repair the connector, or replace harness.	Temporary communication failure occurs.