


# General Description

SUNROOF/T-TOP/CONVERTIBLE TOP (SUNROOF)

## 1. General Description

### A: COMPONENT

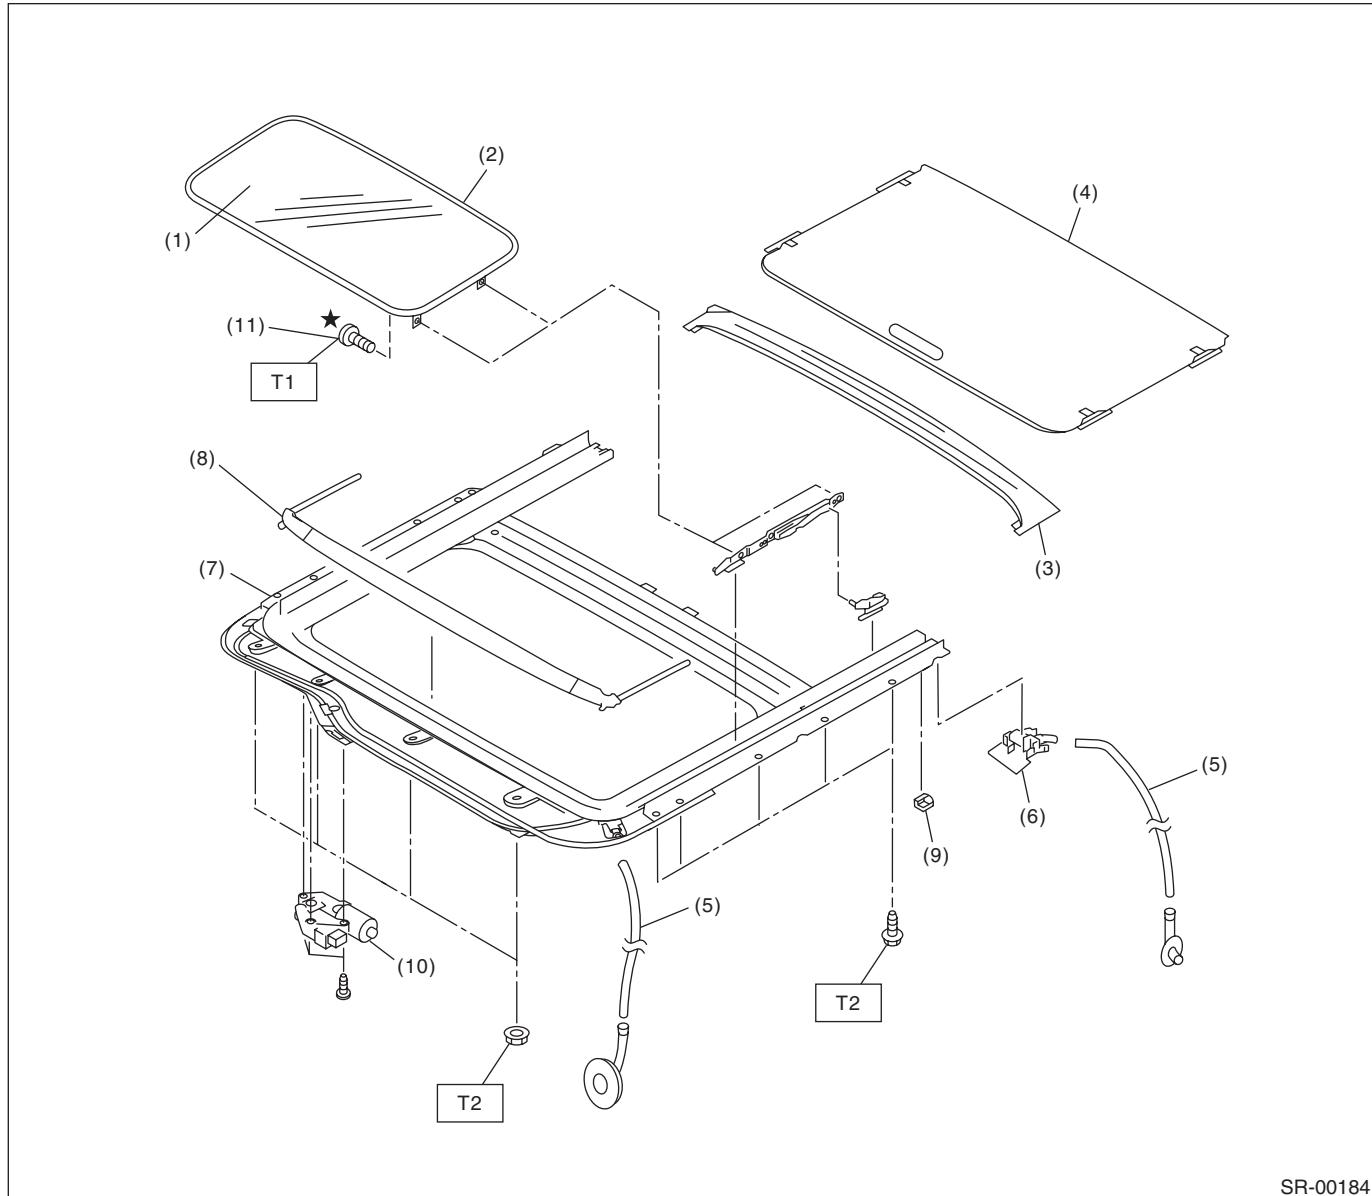

SR-00184

|                   |                   |
|-------------------|-------------------|
| (1) Glass lid     | (7) Frame ASSY    |
| (2) Weather strip | (8) Deflector     |
| (3) Drip rail     | (9) Shade stopper |
| (4) Sunshade      | (10) Motor ASSY   |
| (5) Drain tube    | (11) TORX® bolt   |
| (6) Drain holder  |                   |

**Tightening torque: N·m (kgf-m, ft-lb)**

**T1: 4.5 (0.46, 3.3)**

**T2: 6.0 (0.61, 4.3)**

## General Description

SUNROOF/T-TOP/CONVERTIBLE TOP (SUNROOF)

### B: CAUTION

- Before disassembling or reassembling parts, always disconnect the battery ground cable from battery. When replacing the audio, control module and other parts provided with memory functions, record the memory contents before disconnecting the battery ground cable. Otherwise, the memory is cleared.
- Reassemble the parts in the reverse order of disassembly unless otherwise indicated.
- Adjust parts to the given specifications.
- Connect the connectors securely during reassembly.
- After reassembly, make sure that the functional parts operate normally.

### C: PREPARATION TOOL

#### 1. GENERAL TOOL

| TOOL NAME      | REMARKS   |
|----------------|---|
| Circuit tester | Used for measuring resistance and voltage.      |
| TORX® T25      | Used for removing and installing the glass lid. |
| Hexagon wrench | Used for forcedly driving the sunroof motor.    |