


## 28.Extension Case

### A: REMOVAL

- 1) Remove the transmission assembly from vehicle body. <Ref. to CVT-55, REMOVAL, Automatic Transmission Assembly.>
- 2) Remove the front wheel speed sensor. <Ref. to CVT-106, REMOVAL, Front Wheel Speed Sensor.>
- 3) Remove the harness clip, and remove the extension case.

#### NOTE:

The total number of extension case mounting bolts is ten.

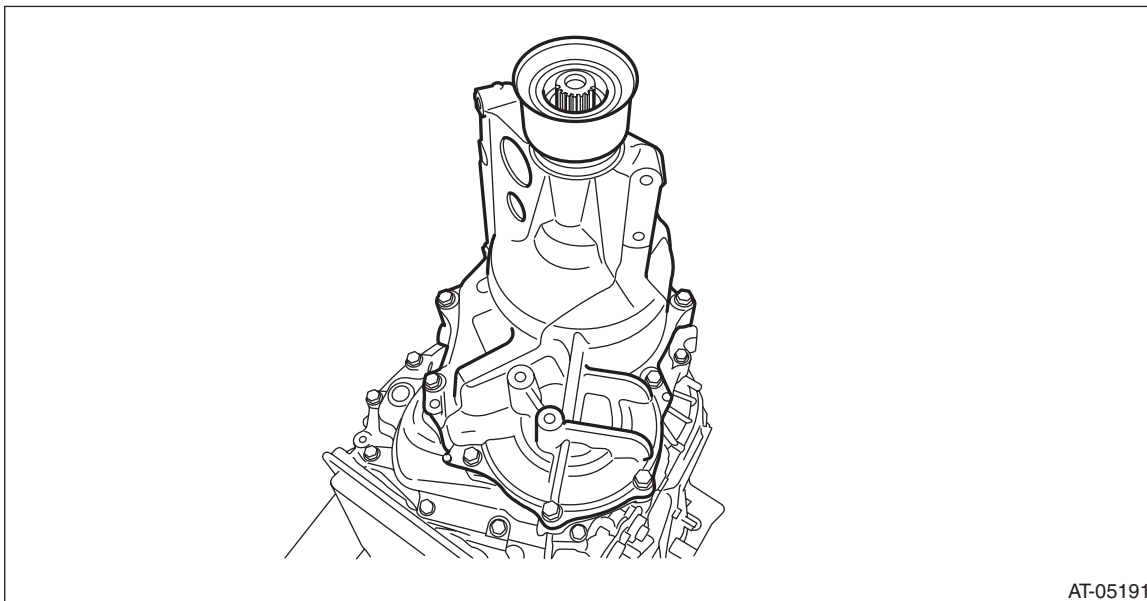


AT-05191

### B: INSTALLATION

- 1) Clean the mating surface of the extension case and intermediate case.
- 2) Select the thrust needle bearing. <Ref. to CVT-142, ADJUSTMENT, Rear Drive Shaft.>
- 3) Select the shim for transfer reduction driven gear. <Ref. to CVT-160, ADJUSTMENT, Transfer Reduction Driven Gear.>
- 4) Install the selected thrust needle bearing to transfer clutch assembly.

#### NOTE:

Install the thrust needle bearing in the correct direction.

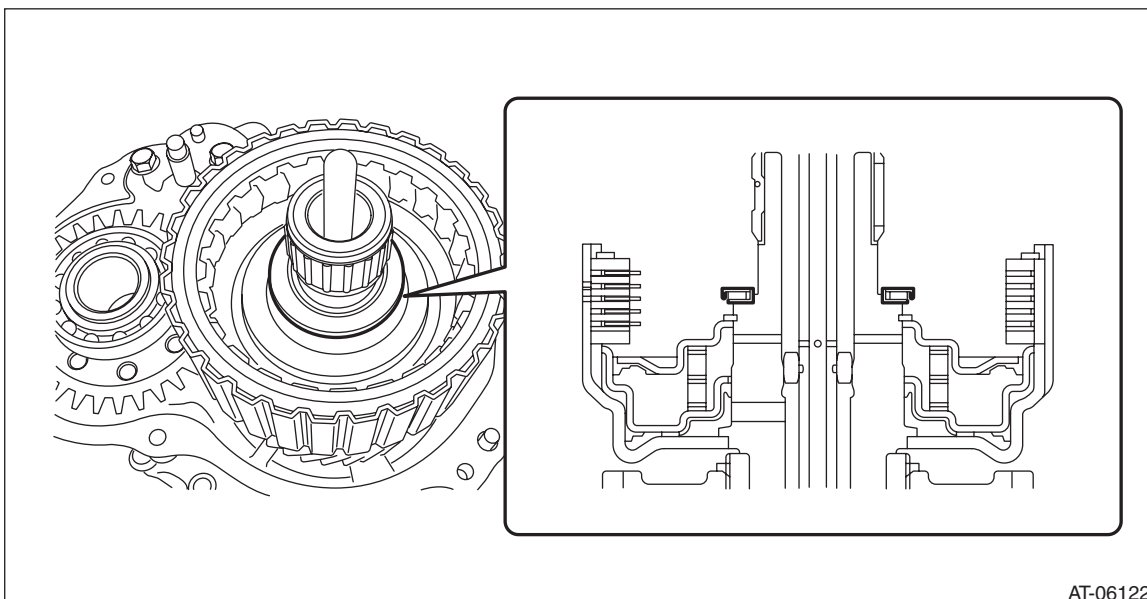

AT-06122

## Extension Case


### CONTINUOUSLY VARIABLE TRANSMISSION

---

- 5) Attach the selected shim to transfer reduction driven gear assembly.
- 6) Apply liquid gasket to extension case seamlessly.

**Liquid gasket:**

**THREE BOND 1215 (Part No. 004403007) or equivalent**

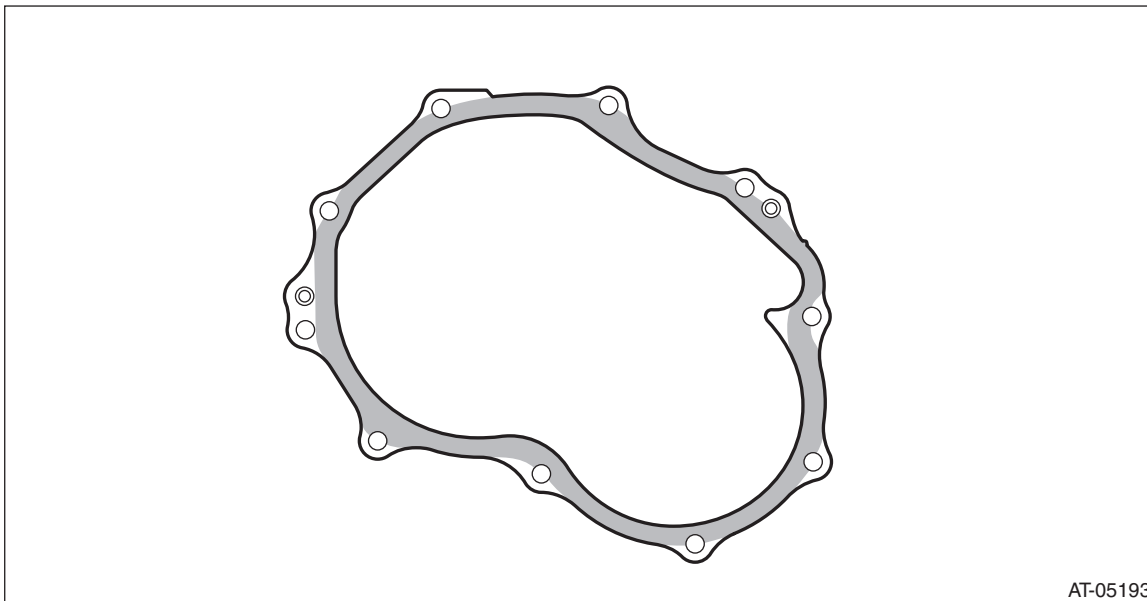


AT-05193

- 7) Install the extension case.

**Tightening torque:**

**25 N·m (2.5 kgf·m, 18.4 ft·lb)**

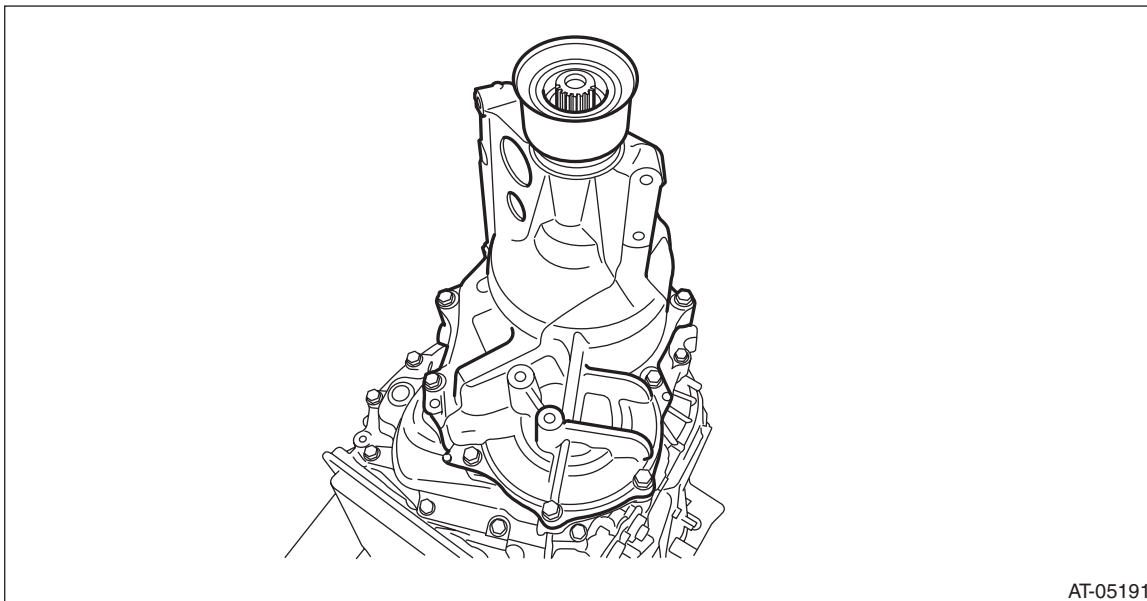

AT-05191

- 8) Install the front wheel speed sensor. <Ref. to CVT-106, INSTALLATION, Front Wheel Speed Sensor.>
- 9) Install the transmission assembly. <Ref. to CVT-69, INSTALLATION, Automatic Transmission Assembly.>

## C: DISASSEMBLY

- 1) Remove the dust cover from extension case.
- 2) Remove the extension case oil seal from the extension case.

## **D: ASSEMBLY**

- 1) Press-fit the dust cover into extension case.
- 2) Install the extension case oil seal to extension case.

ST 498057300 INSTALLER

## **E: INSPECTION**

- Check there is no leak of CVTF from the joint between extension case and intermediate case.
- Check there is no damage or cracks on the extension case.

## **F: ADJUSTMENT**

NOTE:

When replacing the extension case, select the shims for rear drive shaft thrust needle bearing and transfer reduction driven gear. <Ref. to CVT-142, ADJUSTMENT, Rear Drive Shaft.> <Ref. to CVT-160, ADJUSTMENT, Transfer Reduction Driven Gear.>