


40. Starter Relay (Push Button Start)


A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the instrument panel lower cover. <Ref. to EI-63, REMOVAL, Instrument Panel Lower Cover.>
- 3) Remove the relay & fuse box.
 - (1) Disconnect connectors.
 - (2) Remove the bolts and remove the relay & fuse box.

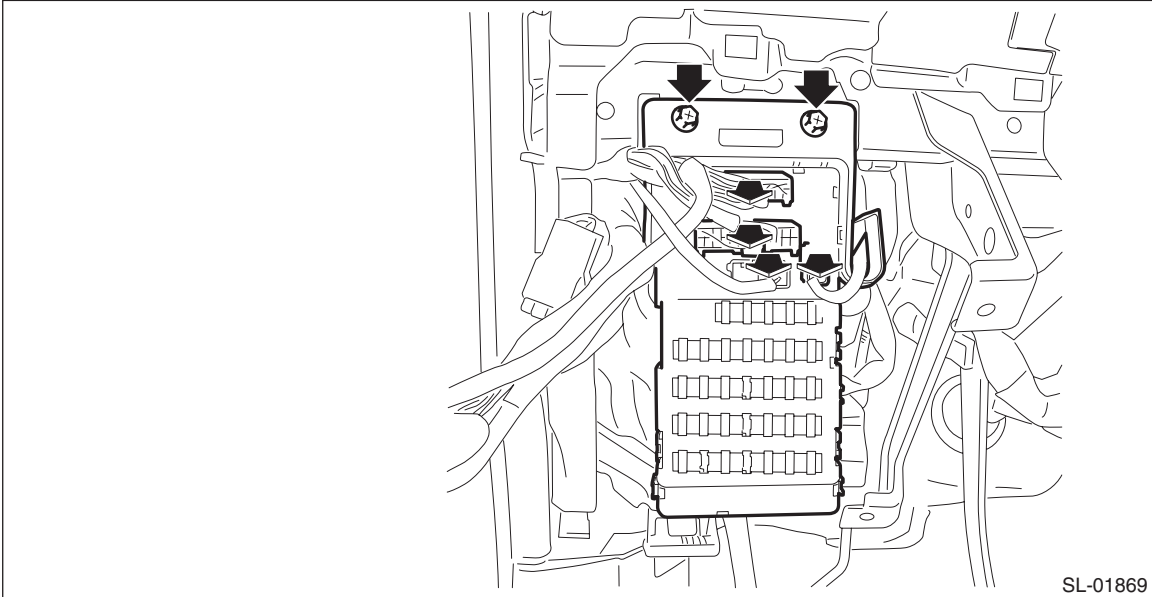

SL-01869

- 4) Remove the connector holder.
 - (1) Disconnect the connector.
 - (2) Remove the bolt and remove the connector holder.

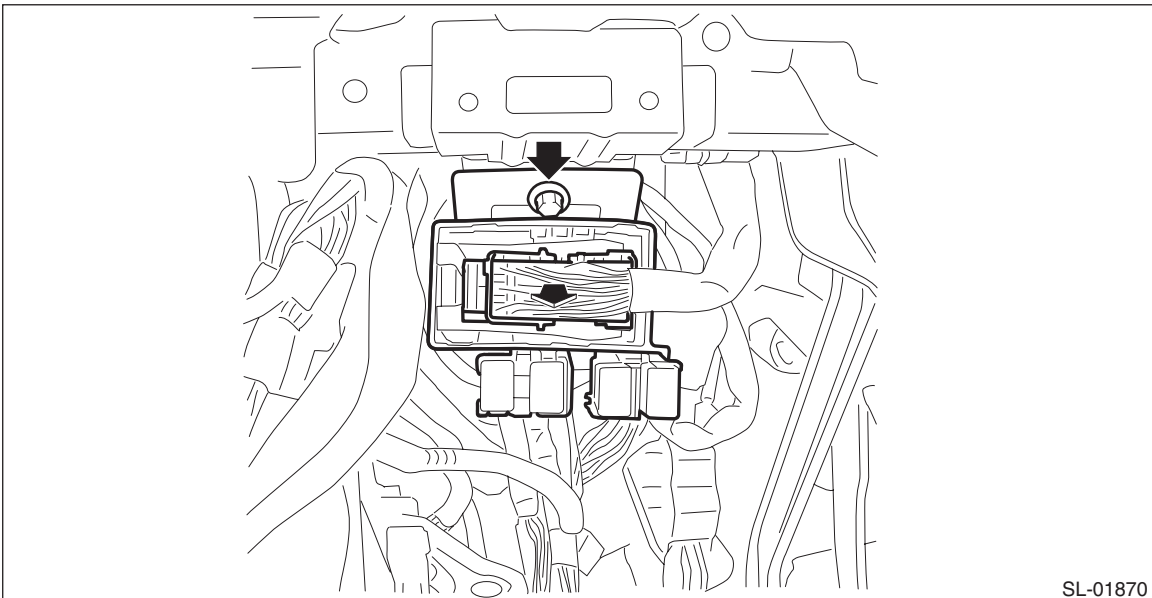


SL-01870

Starter Relay (Push Button Start)

SECURITY AND LOCKS

5) Remove the starter relay (push button start) (A) from the relay holder.

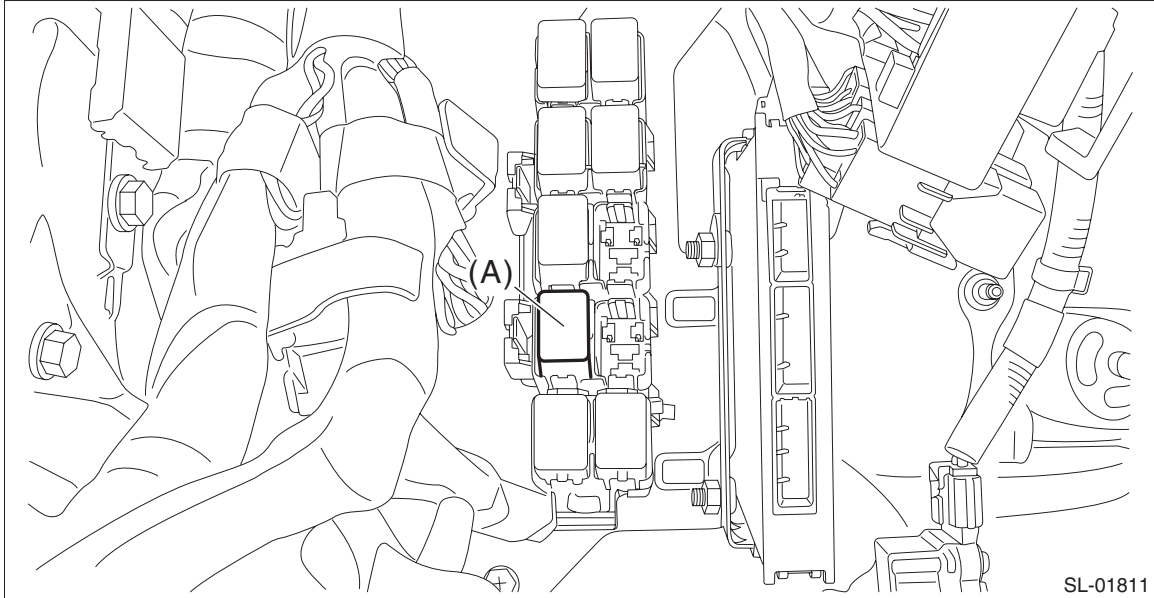

B: INSTALLATION

Install each part in the reverse order of removal.

Tightening torque:

Relay & fuse box: 7.5 N·m (0.76 kgf-m, 5.5 ft-lb)

C: INSPECTION

Refer to "CHECK RELAY" in "Relay and Fuse". <Ref. to SL-10, CHECK RELAY, INSPECTION, Relay and Fuse.>