


9. Outer Mirror


A: REPLACEMENT

- 1) Face the mirror upward.
- 2) Use a flat tip screwdriver to remove clip (A).
- 3) Lift the lower mirror up to remove hooks (B).

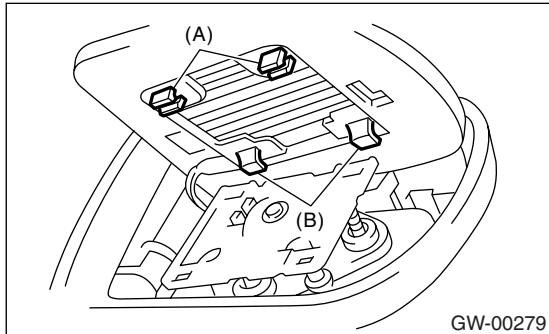


GW-00279

- 4) Disconnect the mirror heater connector from side of the mirror. (Model with mirror heater)

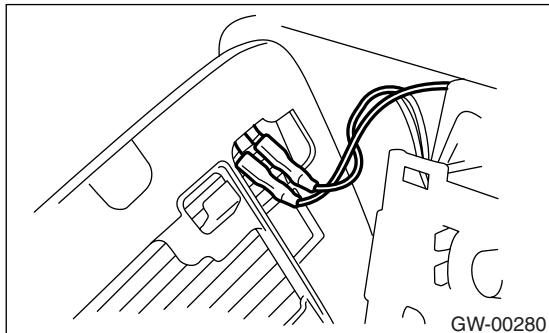

GW-00280

- 5) Catch the hooks (B) and install clips (A).

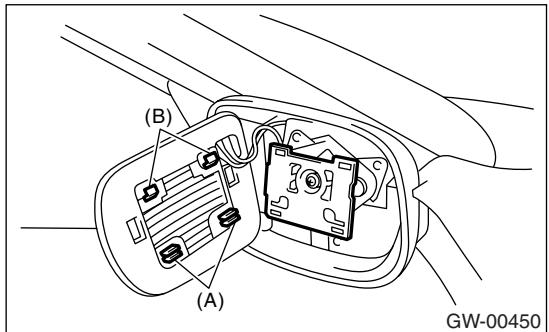

GW-00450

CAUTION:

- When removing the mirror, be careful not to damage the back surface of mirror with a flat tip screwdriver.
- When installing the mirror, insert the hook and clip securely.