


27. High-mounted Stop Light

A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Detach the roof spoiler. <Ref. to EI-31, REMOV-AL, Roof Spoiler.>
- 3) Remove the cap and screw, then detach the high-mounted stop light.

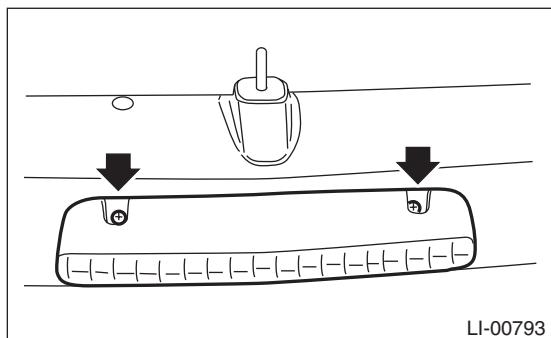

B: INSTALLATION

Install in the reverse order of removal.

C: INSPECTION

- 1) Install the high-mounted stop light to test if it illuminates normally.
- 2) If the high-mounted stop light does not illuminate, replace it with a new one.

NOTE:

Because LEDs (Light Emitting Diodes) are used for the high-mounted stop light, replace the high-mounted stop light as an assembly if the LEDs went out.