


19. Rearview Mirror

A: REMOVAL

- 1) Remove the TORX® screw (1).
- 2) Slide the rearview mirror (2) to the upper side (A) of windshield glass (3), and remove the mirror from mount (4).

CAUTION:

- Be careful not to damage the mirror surface.
- Be careful not to damage the windshield glass.

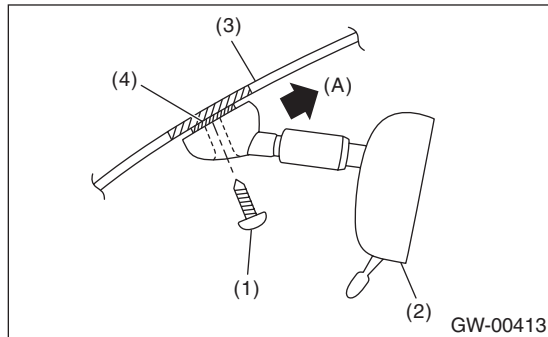

B: INSTALLATION

CAUTION:

When tightening the mounting TORX® screw, be sure to observe the tightening torque. Otherwise, the mount may be damaged in over-torque conditions.

Install in the reverse order of removal.

Tightening torque:

Refer to “COMPONENT” of “General Description”. <Ref. to GW-5, MIRROR, COMPONENT, General Description.>

C: INSPECTION

Check that the mirror is not damaged.