


6. Second Seat Belt


A: REMOVAL

1. OUTER SEAT BELT RH ASSEMBLY AND LH ASSEMBLY

- 1) Remove the second row seats. <Ref. to SE-13, LH&CTR SEAT, REMOVAL, Second Seat.>
- 2) Remove the third-row seats. <Ref. to SE-19, REMOVAL, Third Seat.>
- 3) Remove the rear quarter trim. <Ref. to EI-46, REMOVAL, Rear Quarter Trim.>
- 4) Remove the lower anchor bolt.

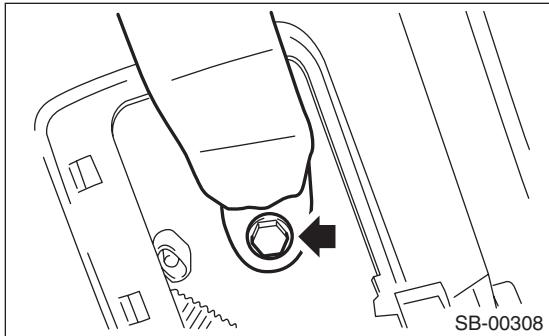


- 5) Remove the bolt to remove outer seat belt retractor.

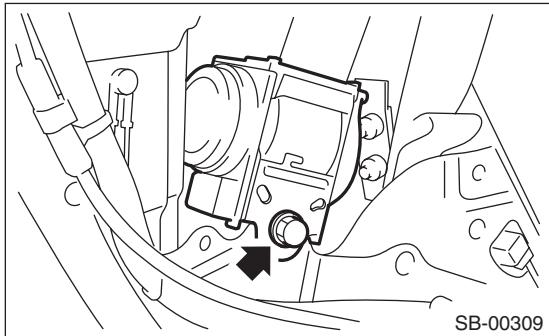

2. SHOULDER SEAT BELT CENTER ASSEMBLY

- 1) Remove the rear quarter trim. <Ref. to EI-46, REMOVAL, Rear Quarter Trim.>
- 2) Remove the cover (A) from roof trim, and then insert it to the inside of roof trim.

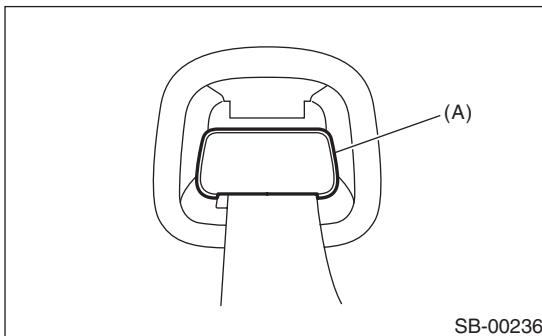


SB-00236

- 3) Remove the clips, and then lower the roof trim end.


CAUTION:

Do not pull the roof trim end backward with excessive force. There is the possibility of the roof trim being damaged.

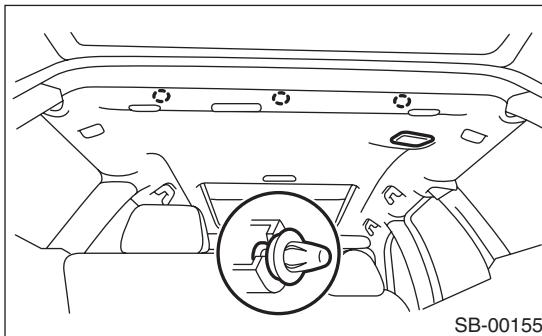

SB-00155


- 4) Remove the bolt to remove the seat belt retractor.

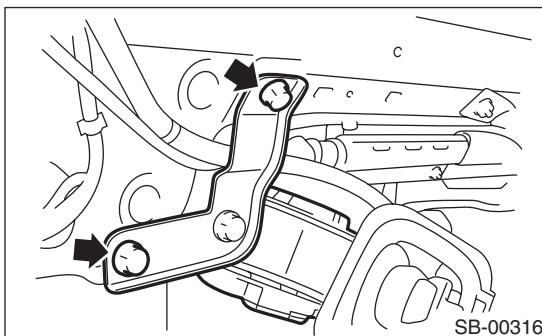

SB-00316


3. INNER SEAT BELT RH ASSEMBLY

- 1) Remove the RH second-row seat assembly.
<Ref. to SE-13, LH&CTR SEAT, REMOVAL, Second Seat.>
- 2) Remove the LH hinge outer cover.
- 3) Remove the bolt, and then detach the inner belt assembly.

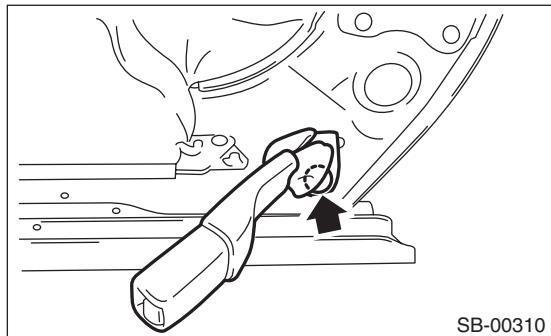


4. SHOULDER SEAT BELT CENTER BUCKLE

- 1) Remove the LH second-row seat assembly.
<Ref. to SE-13, LH&CTR SEAT, REMOVAL, Second Seat.>
- 2) Remove the RH hinge outer cover.
- 3) Remove the bolt, and then remove the shoulder seat belt center buckle.

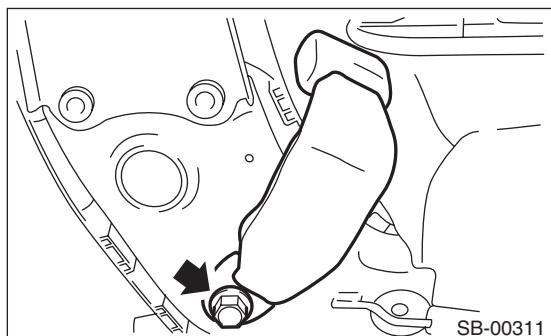

5. INNER SEAT BELT LH ASSEMBLY

- 1) Remove the LH second-row seat assembly.
<Ref. to SE-13, LH&CTR SEAT, REMOVAL, Second Seat.>
- 2) Remove the bolt from the back of the seat cushion, and then detach the inner belt assembly.

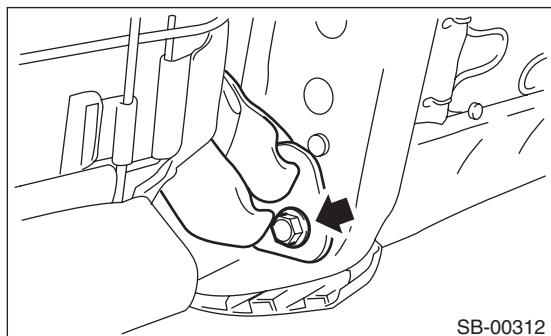

B: INSTALLATION

CAUTION:

When installing, be careful of the routing of the seat belt, and make sure that the belt is not twisted.

Install in the reverse order of removal.

C: INSPECTION

Check for the following, and replace with new parts if necessary.

- Seat belt is slackened, bent or worn. Seat belt is abnormally wound or extended.
- Inner belt is deformed or damaged.
- Seat belt buckle cannot be engaged properly.