


General Description

WHEEL AND TIRE SYSTEM

1. General Description

A: SPECIFICATION

1. WHEEL AND TIRE SIZE

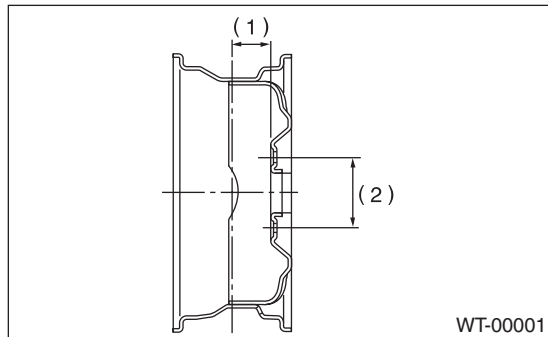

(1) Offset

(2) P.C.D.


Specifications	Tire size	Wheel size	Offset mm (in)	P.C.D. mm (in)	Tire inflation pressure kPa (kgf/cm ² , psi)	
					Front wheel	Rear wheel
Standard type	P255/55R18 104H	18 × 8JJ	55 (2.17)	114.3 (4.50)	230 (2.3, 33)	220 (2.2, 32)
“T-type” Tire	T165/80R17 104M	17 × 4T	40 (1.57)		—	420 (4.2, 60)

2. SERVICE DATA

Part	Axial runout	Radial runout
Aluminum wheel	1.0 mm (0.039 in)	

B: COMPONENT

1. TIRE PRESSURE MONITORING SYSTEM

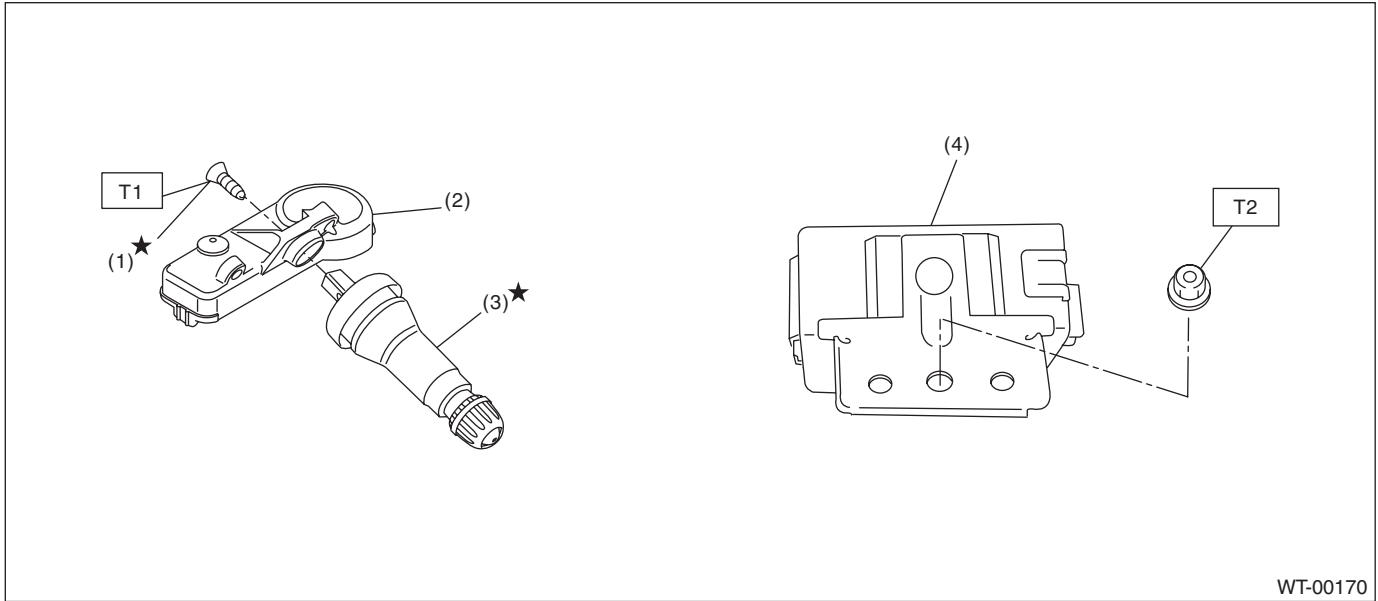

- (1) Screw
- (2) Transmitter (Snap in type)
- (3) Valve

- (4) TPMS & keyless entry control module

Tightening torque: N·m (kgf-m, ft-lb)


T1: 1.4 (0.14, 1)

T2: 7.5 (0.76, 5.5)

General Description

WHEEL AND TIRE SYSTEM

2. SPARE TIRE HOIST

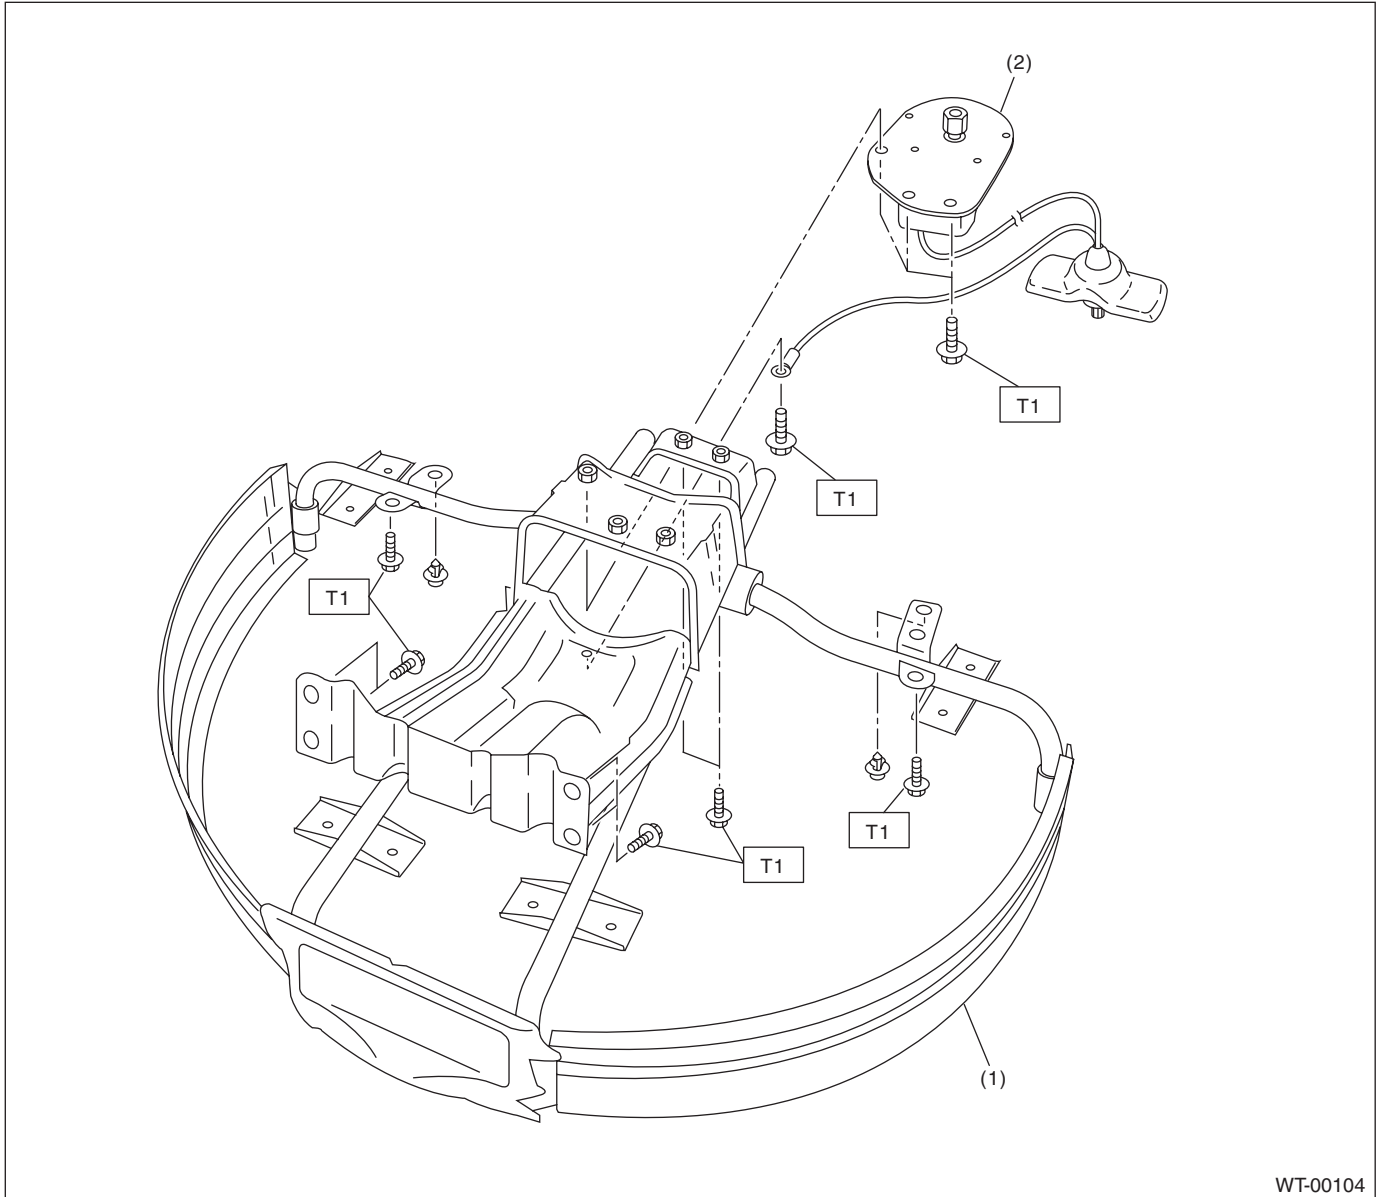

WT-00104

(1) Spare tire guide

(2) Spare tire hoist

Tightening torque: N·m (kgf-m, ft-lb)

T1: 33 (3.7, 24.3)

C: PREPARATION TOOL

1. GENERAL TOOL

TOOL NAME	REMARKS
Air pressure gauge	Used for measuring tire air pressure.
Dial gauge with magnet stand	Used for measuring wheel runout.
Wheel balancer	Used for adjusting wheel balance.